

GRAPHTEC

midi LOGGER GL240

New!



Multifunction analog input ports

Contains a highly isolated input mechanism which ensures that signals are not corrupted by noise from other channels. The GL840/240's inputs are suitable for combined measurements from voltage, temperature, humidity, logic, and pulse signals.

Voltage	Ranges from 20mV to 100V	Pulse	4 channels* Accumulating, Instant or RPM
Temp.	Thermocouple type: R, S, B, K, E, T, J, N, W RTD types (for GL840 only): Pt100, JPt100, Pt1000	Logic	
Humidity	0 to 100%RH - using optional sensor (B-530)	* Requires optional input/output cable (B-513). Select either Pulse or Logic input.	

Maximum Sampling interval up to 10ms

Provides faster sampling rates for voltage measurements. You are able to achieve up to 10ms sampling speed when limiting the number of channels in use.

Sampling interval		10ms	20ms	50ms	100ms
Number of channel					
Measuring	Voltage	●	●	●	●
	Temperature	—	—	—	●

* This chart is applicable when the captured data is saved in the GBD binary file format. Limited sampling speed is available when digital sensors and GL100-WL are used as a remote monitoring device.

Useful functions

Alarm output function

Based on set conditions for each channels, alarm signals can be placed using the four channel alarm output ports.*
* Input/output cable (B-513 option) is required to connect the alarm output ports to external buzzer/light mechanism.

Reliable long term measurement

New GL series carries two SD memory card slots for storage device. The SDHC type SD memory card is supported up to 32GB. 4GB SD memory card comes as a standard accessory installed in the first slot.

Capturing time* (When all 10 analog channels are being used with Logic/Pulse inputs turned off.)

Sampling Interval*	10ms	50ms	100ms	200ms	500ms	1s
GBD format	41 days	88 days	103 days	207 days	over 365	over 365
CSV format	3 days	11 days	16 days	36 days	91 days	182 days

* Figures are approximate. File size of captured data is 2GB in GBD or CSV file format on this chart. Sampling interval is limited by the number of channels in use. (10ms: 1ch, 50ms: 5ch, 100ms: 10ch)
Limited sampling speed is available when digital sensors and GL100-WL are used as a remote monitoring

Ring capture function

The most recent data is saved when the memory is configured in ring memory mode. (Number of capturing data is 1000 to 2000000 points)

Relay capture function

Data is continuously saved to multiple files up to 2GB without losing any data until capturing is stopped when the memory is configured in the relay mode.

Hot-swapping the SD memory card

SD card can be replaced during data capturing when the sampling interval is 100ms or slower.

3 Types of Power Source

Choose from AC power supply, DC supply* or the rechargeable battery pack.*
* DC power drive cable (B-514) and battery pack (B-569) are optional accessories.

Wireless Measurement Using WLAN (optional)

Wireless LAN option enables the wireless communication with other devices. Connects to the GL100-WL wireless unit remotely when set as an access point. When set as a station, PC and smart devices will be able to access the WLAN unit directly.

Connection with GL100



GL100

Max.
4ch

GL100-WL can now be connected to the GL240 as a remote sensor using the WLAN feature.


WLAN unit
(B-568)

Average communication distance approx. 40m
(varies by condition)



Network connection

Remote monitoring and control connecting to LAN

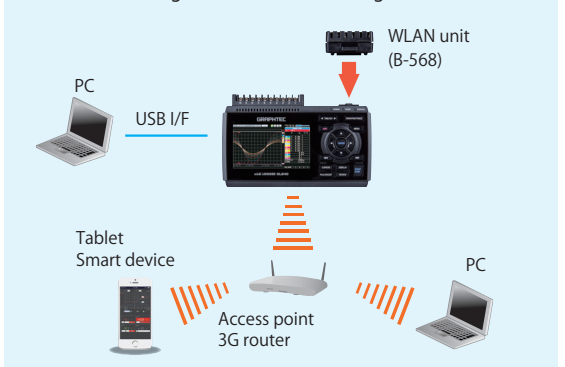

GL240 Main unit specifications		
Item	Description	
Number of analog input channels	10 channels	
External input/output *1	Input *2	Trigger or Sampling (1 channel), Logic/Pulse (4 channels)
	Output *3	Alarm (4 channels)
Sampling interval	10 ms to 1 hour (10ms to 50ms: voltage only) *4, External signal	
Time scale of waveform display	1sec. to 24 hour /division	
Trigger, Alarm function	Trigger action	Start or stop capturing data by the trigger
	Repeat action	Off, On (auto rearmed)
	Trigger source	Start: Off, Measured signal, Alarm, External, Clock, Week or Time Stop: Off, Measured signal, Alarm, External, Clock, Week or Time
	Condition Setting	Combination: OR or AND Analog signal: Rising (High), Falling (Low), Window-in, Window-out Logic signal: Pattern (combination of each input signal in high or low) Pulse (number of count): Rising (High), Falling (Low), Window-in, Window-out
Pulse input function	Alarm output	Outputs a signal when alarm condition occurs in the input signal *5
	Rotation count (RPM)	Counts the number of pulses per sampling interval and converts to rpm (rotations per minute). Number of pulses for one rotation may be set to 50, 500, 5000, 50k, 500k, 5M, 50M, 500M rpm/F.S. (rpm./Full Scale)
	Accumulating count	Accumulates the number of pulses from the start of measurement 50, 500, 5000, 50k, 500k, 5M, 50M, 500M C/F.S. (Counts/Full Scale)
Calculation function	Instant count	Counts the number of pulses per sampling interval 50, 500, 5000, 50k, 500k, 5M, 50M, 500M C/F.S. (Counts/Full Scale)
	Between channels	Addition, Subtraction, Multiplication, and Division for analog input
Search function	Statistical	Select two calculations from Average, Peak, Maximum, Minimum, RMS
		Search for analog signal levels, values of logic or pulse or alarm point in captured data
Interface to PC	USB (Hi-speed), WLAN (using B-568 option)	
Storage device	Media	SD memory card (Support SDHC, up to 32 GB), supports 2 slots *6
	Saved contents	Captured data, Setting conditions, Screen copy
Capturing mode	Mode: Normal, Ring, Relay Ring: Saves most recent data (Number of captured data: 1000 to 2000000 points) *7 Relay: Saves data to multiple files without losing data until data capturing is stopped	
Replay Data	Replays captured data that was saved in the GL240 (in BGD or CSV format)	
Scaling (Engineering unit) function	Measured value can be converted to the specified engineering unit • Analog voltage: Converts using four reference points (gain, offset) • Temperature: Converts using two reference points (offset) • Pulse count: Converts using two reference points (gain)	
Action during data capture	• Displaying parst data (using dual display mode (Current + Past data)) • Hot-swapping the SD memory card • Saving data in between cursors	
Display	Size	4.3-inch TFT color LCD (WQVGA: 480 x 272 dots)
	Language	English, French, German, Chinese, Korean, Russian, Spanish, Japanese
	Information *8	Waveform in Y-T with digital values, Waveform only, Digital value, Digital values and statistics values
Operating environment	0 to 45 °C, 5 to 85 % RH (non condensed) (When operating with battery pack 0 to 40 °C, charging battery 15 to 35 °C)	
Power source	AC adapter	100 to 240 V AC, 50/60 Hz (1 pc of adapter is attached as standard accessory)
	DC power	8.5 to 24 V DC (DC drive cable (option B-514) is required)
	Battery pack	Mountable battery pack (battery pack (option B-569): 7.2V DC, 2900mAh)
Power consumption *9	Max. 36 VA	
External dimensions (W x D x H)	Approx.188 x 117 x 42 mm (Excluding projections)	
Weight *10	500 g	

Software specifications for PC		
Item	Description	
Model name	GL100_240_840-APS	
Supported OS	Windows 8.1, 8, 7, Vista (32/64-bit edition)	
Supported device	GL840 (USB, Ethernet, WLAN), GL240 (USB, WLAN), GL100 (USB, WLAN)	
Functions	Control the GL series, Real-time data capture, Replay data, and Data format conversion	
Supported units & channels	Up to 1000 channels total, Up to 4 groups (number of units is limited by model)	
Settings control	Input condition, Capturing condition, Trigger/Alarm condition, Report, etc.	
Capturing data	Saved to PC	Saves captured data in real time (in GBD binary or CSV format)
	Saved to GL unit	Saves to the SD memory card (in GBD binary or CSV format)
Displayed information	Y-T waveform, Digital values, Report, X-Y graph (specified period of data, data reply only), Two displays for the current and past data, and Statistical calculation	
File operation	Converting data format to CSV from GBD binary, merge multiple data files in the time axis or as an additional channel	
Warning function	Send e-mail to the specified address when the alarms occur	
Statistical calculation	Maximum, Minimum, and Average during data capturing	
Report function	Creates the daily or monthly report automatically	

Software specifications for Smart device		
Item	Description	
Model name	GL-Connect	
Supported OS	Android 4.1 to 4.4, IOS 7/8	
Supported device	GL840 (WLAN), GL240 (WLAN), GL100 (WLAN)	
Functions	Control the GL series, Display measured data in waveform or digital value	
Supported units	Up to 10 units	
Settings control	Start/Stop, Sampling interval	
Capturing data	Saves captured data in the GL main body (data cannot be saved in the smart device)	
Displayed information	Data captured in real time by digital value, Replay the data stored in the GL body by the waveform	


Options and Accessories		
Item	Model number	Description
Wireless LAN unit	B-568	WLAN adapter, IEEE802.11b/g/n
Battery pack	B-569	Rechargeable Lithium-ion battery (7.2 V, 2900mAh)
Input/Output cable for GL series	B-513	2 m long (no clip on end of cable)
DC drive cable	B-514	2 m long (no clip on end of cable)
Humidity sensor	B-530	With 3 m long signal cable (with power plug)
Shunt resistor	B-551-10	250 ohms (it converts the signal to the "1-5V" from the "4-20mA")
AC power adapter	ACADP-20	Input: 100 to 240 V AC, Output: 24 V DC

- Due to the possibility of equipment or PC failure, the data files on the instrument will not be guaranteed to be held on the memory. Please make a backup of data whenever possible to avoid data loss.
- Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners.
- Specifications are subject to change without notice. For more information about product, please check the web site or contact your local representative.

GL240 Analog input specifications				
Item	Description			
Input method	All channels isolated balanced input *11, Scans channels for sampling			
Type of input terminal	Screw terminal (M3 screw)			
Measurement range	Voltage	20, 50, 100, 200, 500 mV, 1, 2, 5, 10, 20, 50, 100 V, and 1-5V F.S. (Full Scale)		
	Thermocouple	Type: K, J, E, T, R, S, B, N, and W (WRE5-26)		
	Humidity	0 to 100 % RH - using the humidity sensor (option B-530)		
Filter	Off, 2, 5, 10, 20, 40 (moving average in selected number)			
Measurement accuracy *12	Voltage	± 0.1% of F.S. (Full Scale)		
		Temperature (Thermocouple)*13	Type	Measurement range (TS: Temp Sense)
	R		0 ≤ TS ≤ 100 °C	± 5.2 °C
		100 < TS ≤ 300 °C	± 3.0 °C	
		300 < TS ≤ 1600 °C	± (0.05% of rdg. + 2.0 °C)	
	S	0 ≤ TS ≤ 100 °C	± 5.2 °C	
		100 < TS ≤ 300 °C	± 3.0 °C	
		300 < TS ≤ 1760 °C	± (0.05% of rdg. + 2.0 °C)	
	B	400 ≤ TS ≤ 600 °C	± 3.5 °C	
		600 < TS ≤ 1820 °C	± (0.05% of rdg. + 2.0 °C)	
	K	-200 ≤ TS ≤ -100 °C	± (0.05% of rdg. + 2.0 °C)	
		-100 < TS ≤ 1370 °C	± (0.05% of rdg. + 1.0 °C)	
	E	-200 ≤ TS ≤ -100 °C	± (0.05% of rdg. + 2.0 °C)	
	-100 < TS ≤ 800 °C	± (0.05% of rdg. + 1.0 °C)		
T	-200 ≤ TS ≤ -100 °C	± (0.1% of rdg. + 1.5 °C)		
	-100 < TS ≤ 400 °C	± (0.1% of rdg. + 0.5 °C)		
J	-200 ≤ TS ≤ -100 °C	± 2.7 °C		
	-100 < TS ≤ 100 °C	± 1.7 °C		
	100 < TS ≤ 1100 °C	± (0.05% of rdg. + 1.0 °C)		
N	-200 ≤ TS < 0 °C	± (0.1% of rdg. + 2.0 °C)		
	0 ≤ TS ≤ 1300 °C	± (0.1% of rdg. + 1.0 °C)		
W	0 ≤ TS ≤ 2000 °C	± (0.1% of rdg. + 1.5 °C)		
	R.J.C.	± 0.5 °C		
A/D converter	Sigma-Delta type, 16 bits (effective resolution: 1/40000 of the measuring full range)			
Maximum input voltage	Between (+) / (-) terminal	20 mV to 1 V range: 60 Vp-p		
	Channels (-) / (-)	60 Vp-p		
	Channel / GND	60 Vp-p		
Max. voltage (withstand)	Between channels	350 Vp-p (1 minute)		
	Channel / GND	350 Vp-p (1 minute)		

Wireless LAN unit (option) specifications	
Item	Description
Model number	B-568
Supported GL series	GL840, GL240
Communication method	Wireless communication (using radio waves in the 2.4GHz band)
Supported WLAN system	IEEE802.11b/g/n WPS: Push button or PIN method Security protocols: WEP64, WEP128, WPA-PSK/WPA2-PSK, AKIP/AES Communication distance: Approx. 40m (depending on the conditions of radio communication)
Installed location	Attached to the SD CARD slot number 2 on the GL840/GL240 * When the wireless LAN unit is installed, the SD memory card cannot be used in slot number 2
Function	Access Point mode: Communicate with the GL100-WL as a remote sensor (captured data in the GL100-WL is transferred to GL840/GL240) Station mode: Communicate with PC or Smart device (control GL840/GL240 and transfer the data from GL840/GL240)
Connected number of GL100-WL	GL840: Up to 5 units of the GL100-WL GL240: 1 unit of the GL100-WL

- *1. Input/Output cable for GL (option B-513) is required to connect the signal.
- *2. Input signal;
 - Voltage range: Up to 24V (common ground)
 - Signal type: Voltage, Open collector, Contact (relay)
 - Threshold: Approx. + 2.5 V (Hysteresis: Approx. 0.5V (2.5V to 3V))
- *3. Output signal: Open collector (pull-up to 5V by 10kΩ resistor)
 - <Maximum rating of the output transistor>
 - Voltage: Max. 30V, • Current: Max. 0.5A, • Collector dissipation: Max. 0.2W
- *4. Minimum interval varies by number of channels used.
- *5. Output port can be specified in each input channel.
- *6. 4GB SD memory card is installed to slot 1 as standard accessory.
- *7. Size of the capture data will be limited to 1/3 of available memory.
- *8. Display mode is switched every time the dedicated key is pressed. In magnified digital value mode, the displayed channel number can be specified. In the waveform display mode, the changing of the time scale will be effective from the point of the next displayed data.
- *9. Rating under maximum power consumption using the AC adapter, with LCD display on, and battery pack being charged.
- *10. Excludes AC adapter and battery pack.
- *11. The terminal "b" for using the RTD is connected each other across all channels.
- *12. Subject to the following conditions:
 - Room temperature is 23 °C ± 5 °C.
 - When 30 minutes or more have elapsed after power was turned on.
 - Filter is set to 10.
 - Sampling rate is set to 1 sec, using 10-channel.
 - GND terminal is connected to ground.
- *13. Wire size of thermocouple used is 0.32mm diameter in the T type and 0.65mm diameter in other types.

 For using equipment in correctly and safely

Before using it, please read the user manual and then please use it properly in accordance with the description.
To avoid malfunction or an electric shock by current leakage or voltage, please ensure a ground connection and use according to the specification.

GRAPHTEC
Graphtec Corporation

503-10 Shinano-cho, Totsuka-ku, Yokohama 244-8503, Japan
Tel : +81-45-825-6250 Fax : +81-45-825-6396
Email : webinfo@graphtec.co.jp

Website <http://www.graphteccorp.com>

