

INF-USB Universal Serial Bus Output Module

Why the Interface INF-USB Universal Serial Bus Output Module is the best in class:

- Supply via USB
- Up to 16-bit resolution
- Input for mV/V, mA, and ± 5 V
- Shunt cal trigger via software
- Compatible with many Interface load cells and torque transducers
- Graphing and logging software
- Data logged into CSV format text file




INPUT

MODEL	INF-USB-A	INF-USB-B	INF-USB-C
Input	± 5 V	0-20 mA	± 3.2 mV/V
Excitation	12V 80mA	12V 80mA	4V 20mA
Resolution (Counts)	$\pm 25,000$	$\pm 25,000$	$\pm 32,000$
Input Resistance	1.3 M Ω	62 Ω	200 G Ω

SPECIFICATIONS

POWER	
From USB	4 to 6 VDC, 350mA
PERFORMANCE	
Measuring Rate	5000/sec*
Temperature Drift	4 counts/10°C
Nonlinearity	± 5 counts
Accuracy	± 5 counts
Zero Point	32,768 counts
Nominal temperature range	+10 to +40°C
Operating temperature range	0 to +50°C
Storage temperature range	-10 to +70°C
Max cable length to sensor	3m
Max USB cable length	5m
SOFTWARE	Windows XP or Vista

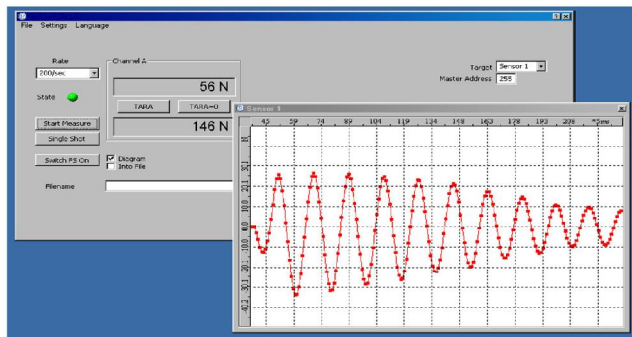

*Limited to 200 measures/sec by INF-USB-VS software

nbn
ELEKTRONIK AG

Birmensdorferstrasse 30 Tel +41 (0)44 404 34 34
CH-8142 Uitikon Fax +41 (0)44 493 50 32
sales@nbn-elektronik.ch www.nbn-elektronik.ch

INF-USB.DOC
8/10/09