



nbn
ELEKTRONIK AG
www.nbn-elektronik.ch

nbn Elektronik AG
Haslenstrasse 7
CH-8903 Birmensdorf
Tel. +41 (0)44 523 63 33
Fax +41 (0)44 493 50 32
sales@nbn-elektronik.ch




INFRARED CAMERAS

The most portable infrared online cameras in the world

innovative infrared technology

Important features of the Optris infrared cameras

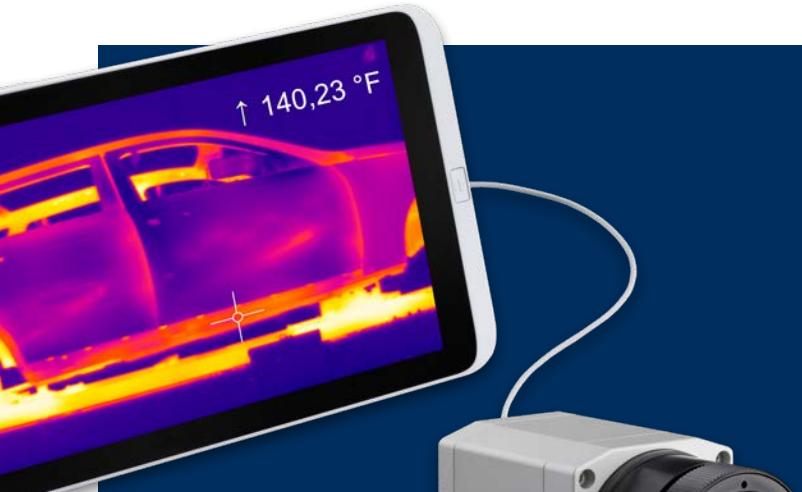


Special advantages

- Temperature ranges from -20°C to 2000°C (-4°F to 3632°F)
- Small cameras ideal for OEM use
- Up to 1 kHz for fast processing
- Optical resolution up to 764 x 480 pixels
- Includes license-free analysis software and full SDK for Windows and Linux




Automatic hotspot search

Objects can be thermally analyzed and **hot or cold spots** can be found automatically.

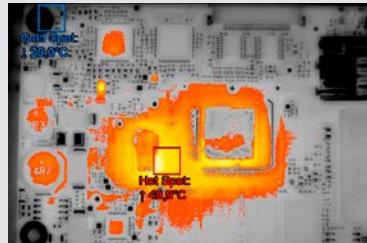


Fast measurements

Temperature distributions on a surface can be precisely recorded at **millisecond intervals**.

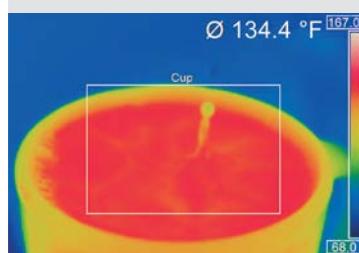


A drop of milk falling into a cup of coffee

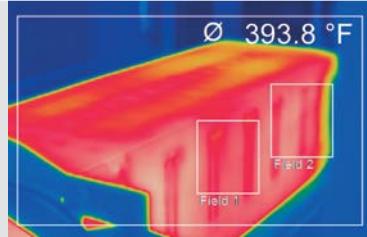

Simple process integration

Advanced interface concepts enable integration into networks and automated systems:

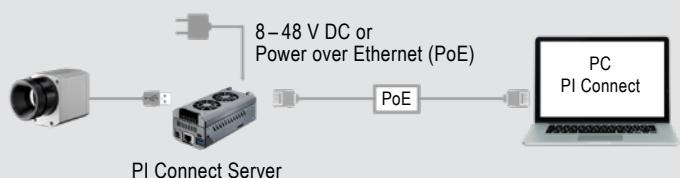

Portable and stationary

The cameras bridge the existing gap between portable infrared snapshot cameras and purely stationary devices.

Examples of areas of application are:

- Process automation
- Test stations
- Research & development
- Mobile measuring tasks

- USB cable extension up to 100 m (328.1 ft) (over Ethernet)
- Industrial Process Interface (PIF) with two analogue inputs, one digital input and over three analogue outputs/alarm outputs with three isolated relays (0 – 30 V / 400 mA); additional fail-safe relay.
- Software Development Kit (SDK) for integration of the camera into customer-specific software via Dynamiclink Library (DLL) or COM-Port.

Small camera ideal for OEM use




- Outstanding value for money
- Very good thermal sensitivity of 80 mK
- Thermal image up to 120 Hz
- Detector with 160 x 120 pixels
- Compact design (dimensions: 45 x 45 x 62 mm [1.77 x 1.77 x 2.44 in])
- Includes license-free analysis software and full SDK

Surface measurements in industrial application

The optris® PI 160 infrared camera is always used when temperature monitoring of surfaces is required and the single point measurement of pyrometers is no longer sufficient.


Nowadays surface measurements are essential in the automotive field, in plastic applications and in the solar industry.

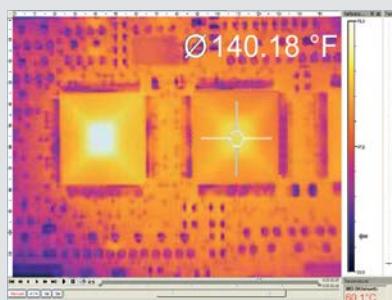

Suitable lenses for every measurement distance

Same measurement field size at different measurement distances:


- Telephoto lens:
2.13 m (7 ft) measurement distance
- Standard lens:
0.6 m (2 ft) measurement distance
- Wide-angle lens (41°):
0.32 m (1 ft) measurement distance
- Wide-angle lens (72°):
0.17 m (0.6 ft) measurement distance



Dimensions in mm
(Dimensions in in)

Hand as measurement object:
measurement field size 240 mm x 180 mm
(9.45 in x 7.09 in)
pixel size 1.5 mm (0.06 in)

160 x 120 pixels

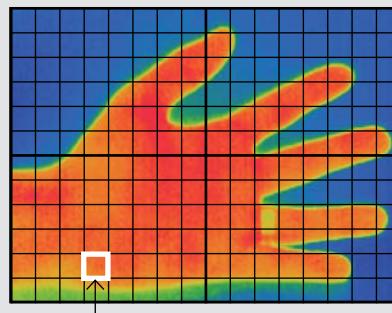


10 x 10 pixels = 225 mm² (8.86 in²)

optris® PI 200 / PI 230

INFRARED CAMERA WITH BI-SPECTRAL TECHNOLOGY

Two cameras in one compact device

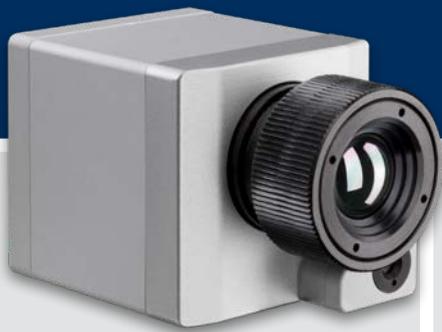

- BI-SPECTRAL Technology
- Time-synchronized visual image recording at up to 32 Hz (640 x 480 pixels)
- Real image camera is highly sensitive in low-light conditions
- Thermal images to 128 Hz (160 x 120 pixels)
- Compact design (dimensions: 45 x 45 x 62 mm [1.77 x 1.77 x 2.44 in])
- Includes license-free analysis software and full SDK

BI-SPECTRAL Technology


With the help of BI-SPECTRAL technology a **visual image (VIS)** can be combined with a **thermal image (IR)** and plotted synchronistically:

Surveillance mode:


Easy orientation at the measuring point through separate display of the visual picture.

Crossfade mode:


Highlight critical temperatures by means of crossfade (transparency from 0 to 100 %) or by means of superimposition of defined temperature fields (thresholds).

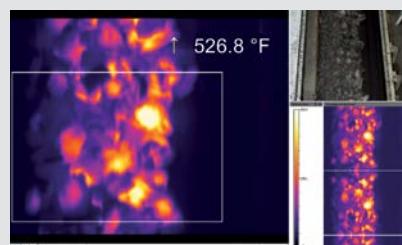

Monitoring of a carbon ribbon

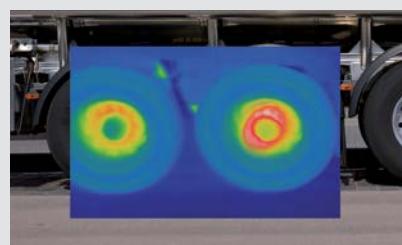

Measurement of the brake temperature in superimposed picture

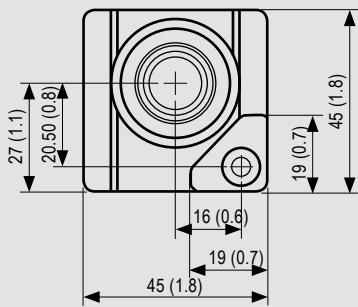




Dimensions in mm
(Dimensions in in)



Cross-fade of a VIS image above 35 °C (95 °F)

INFRARED CAMERA WITH HIGH OPTICAL RESOLUTION

The smallest camera in its class

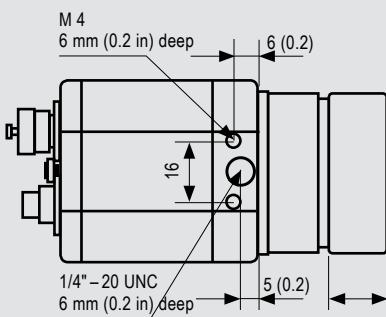
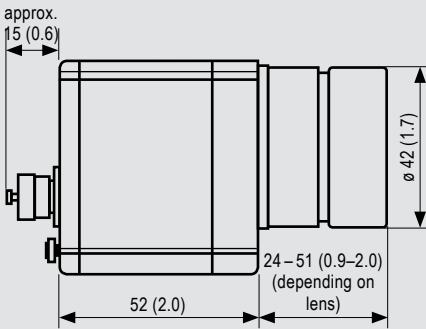


Dimensions in mm
(Dimensions in in)

- The smallest camera in its class (46 x 56 x 90 mm [1.81 x 2.20 x 3.54 in])
- Very good thermal sensitivity at 40 mK
- Thermal image recording up to 80 Hz
- Interchangeable lenses & industrial accessories
- LightWeight (320 g (11.3 oz) incl. lens)
- Detector with 382 x 288 pixels
- Includes license-free analysis software and full SDK

High-performance for a wide range of uses


The high-performance optris® PI 400 infrared camera has a wide range of uses in industry. For example, thermal image shots help to monitor processes and ensure the quality of manufactured products in the automotive field in particular, in the manufacturing of plastics as well as in the semiconductor and photovoltaic industry.

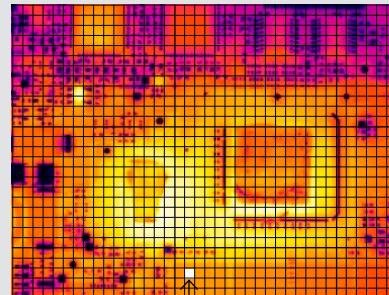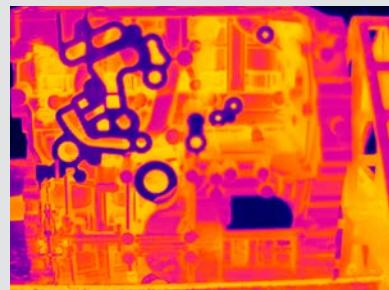

SMD chip as measurement object:
measurement field size: 240 mm x 180 mm
(9.4 x 7.1 in), pixel size: 0.63 mm (0.025 in)




80 Hz recordings with full pixel resolution

The display and recording of thermal images at full optical resolution can be done at high measurement speeds of 80 frames per second.

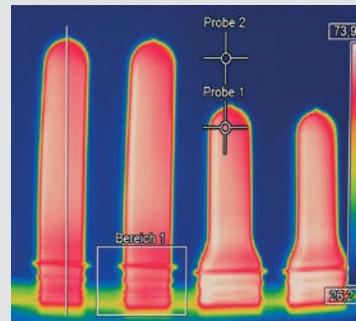

Thermal image shots of preforms
in PET bottle production

Detection of minimal temperature differences

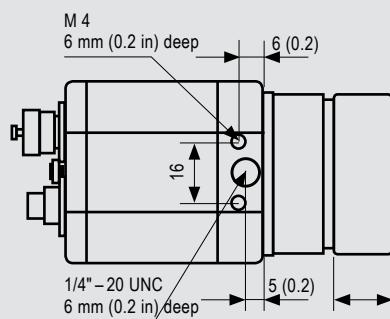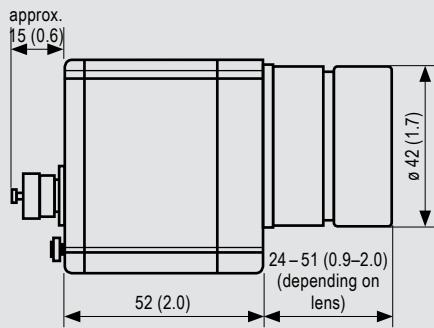


Dimensions in mm
(Dimensions in in)

- The smallest camera in its class (46 x 56 x 90 mm [1.81 x 2.20 x 3.54 in])
- Exceptional thermal sensitivity at 40 mK
- Thermal image recording up to 80 Hz
- Interchangeable lenses & industrial accessories
- Lightweight (320 g (11.3 oz) incl. lens)
- Detector with 382 x 288 pixels
- Usable at ambient temperatures of up to 70 °C (158 °F) without the need for additional cooling
- Includes license-free analysis software and full SDK



Highest temperature resolution of 40 mK

With an optical resolution of 40 mK, the optris® PI 450 is used for measuring the most subtle temperature differences, e.g. in the quality control of products or in preventive medicine.

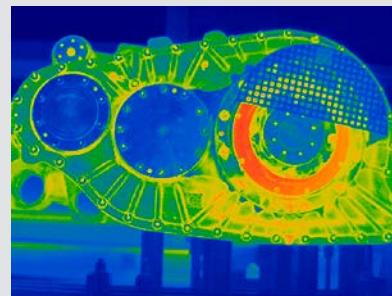

Application example in the medical sector





Due to the very high temperature resolution of the optris® PI 450, even veins can be made visible under the skin.

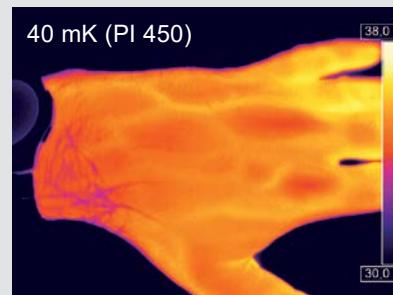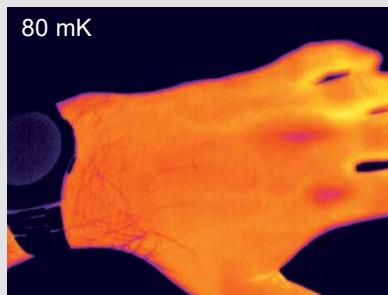

THERMOGRAPHY IN VGA RESOLUTION

**The smallest
VGA infrared
measurement
camera in the world**

- 640 x 480 pixels
- Radiometric video recording at 32 Hz / 125 Hz in subframe-mode (640 x 120 pixels)
- Compact size of 46 x 56 x 90 mm (1.81 x 2.20 x 3.54 in)
- Lightweight (320 g [11.3 oz] incl. lens)
- Includes license-free analysis software and full SDK

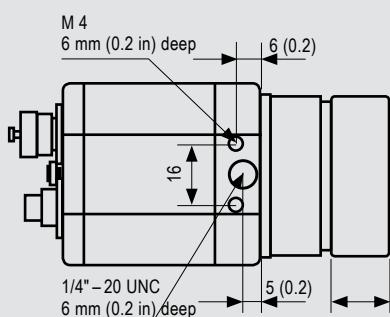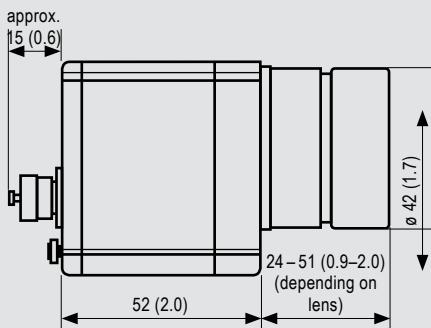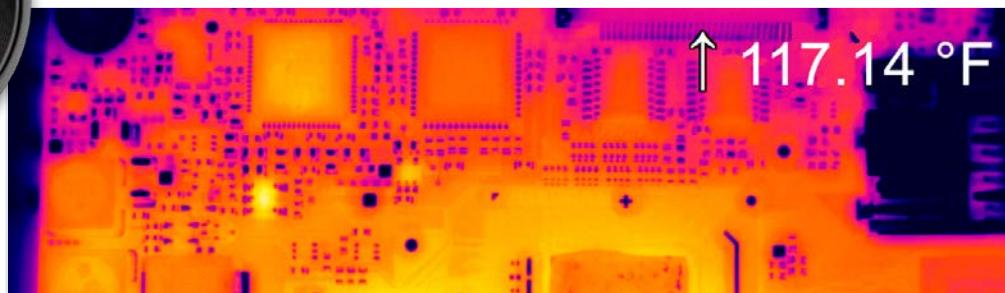


Dimensions in mm
(Dimensions in in)

**Razor sharp infrared
pictures and videos for
process optimization**

With a casing size of only 46 x 56 x 90 mm (1.81 x 2.20 x 3.54 in) and a weight of 320 grams (11.3 oz) (incl. lens), the optris® PI 640 is among the most compact infrared cameras on the market.

The high-definition optris® PI 640 infrared camera is best used in applications where finest thermal details matter.


It significantly contributes to process optimization in both research and development and in industry.

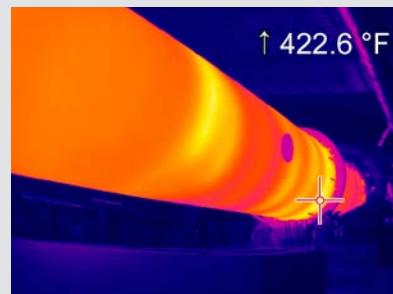

optris® PI 450 G7 / PI 640 G7

INFRARED CAMERAS FOR ANECHOIC INFRARED SURFACE TEMPERATURE MEASUREMENTS ON GLASS

High-resolution thermography solution for the glass industry

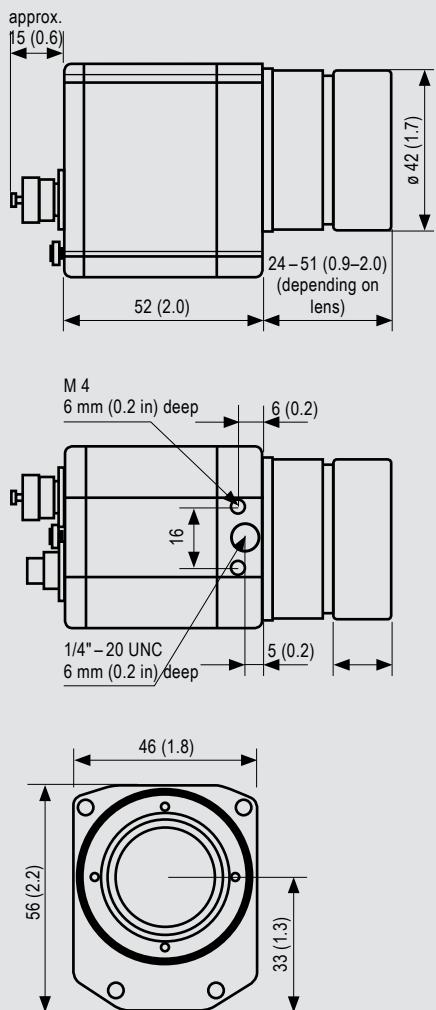


Dimensions in mm
(Dimensions in in)

- Usable at ambient temperatures of up to 70 °C (158 °F) without the need for additional cooling
- With an integrated filter for the spectral range of 7.9 µm
- Compact size of 46 x 56 x 90 mm (1.8 x 2.2 x 3.5 in)
- Frame rate up to 125 Hz
- Line scan function through license-free analysis software optris® PI connect
- Max. scan angle of 111 °C (232 °F) with 800 pixels per line


Exact temperature measurements on glass surfaces via line-scan camera function

The temperature of glass is best measured in the range of spectral absorption bands. For this purpose the optris® PI 450/PI 640 G7 has an integrated 7.9 µm filter which enables an anechoic IR surface temperature measurement. Its compact size makes the optris® PI 450/PI 640 G7 particularly suitable for use in confined spaces and for installation in industrial facilities. The infrared camera is fully operational at ambient temperatures of up to 70 °C (158 °F) without the need for cooling. With an imaging frequency of up to 125 Hz, glass products can be continuously tested, even in fast processing.


The line-scan camera function (linescan mode) of the PI Connect software enables the exact temperature measurement of panes of glass during transport on conveyor belts. This is a particularly important quality factor in tempering processes, e.g. in ESG and VSG.

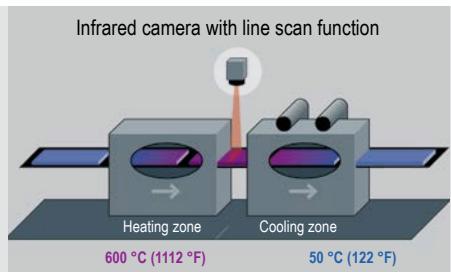

Construction of a glass tempering plant

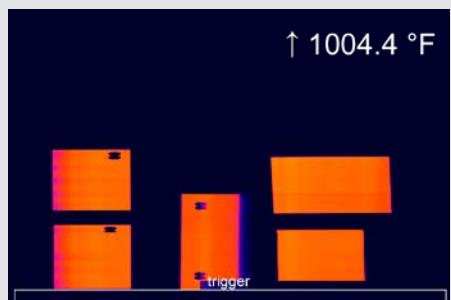

Glass panes between heating and cooling zone

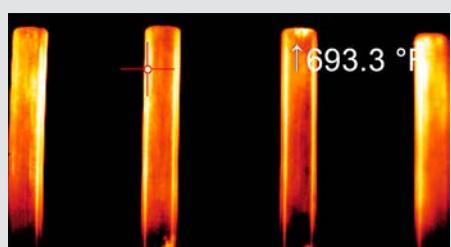


Glass tube manufacturing



Hot-spot measurement in the production of glass bottles

INFRARED CAMERAS FOR THE SHORTWAVE DOMAIN

Ultra compact infrared cameras for the metal industry

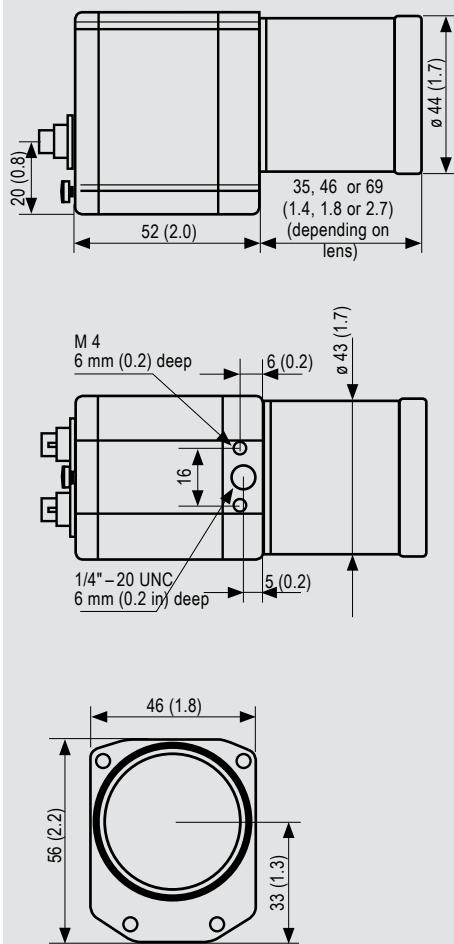

Dimensions in mm

- Highly dynamic CMOS detector with an optical resolution of up to 764 x 480 pixels
- Very large temperature measurement ranges (without sub-ranges) of 450 °C to 1800 °C (842 °F to 3272 °F) (PI 1M) and of 900 °C to 2000 °C (1652 °F to 3632 °F) (PI 05M)
- Frame rates and linescanning function up to 1 kHz for fast processes
- Real-time output of 8 x 8 pixels with 1 ms response time
- Includes license-free analysis software and full SDK
- New: PI 05M – Ideally suited for all laser processing applications with solid-state lasers in NIR through excellent blocking of radiation above 540 nm

Intelligent temperature measurement – innovative and fast

The new optris® PI 05M and PI 1M IR cameras are specially suited for measuring the temperature of metals, as these exhibit a distinctly higher emissivity at the short measurement wavelength of 500 nm and 1 μm than at measurements in the previously conventional wavelength range of 8–14 μm.


Especially the new spectral range of 500 nm enables for more precise measurements at changing emissivities and is less sensitive to atmospheric influences. Thus, the PI 05M is ideally suited for temperature measurements of molten metals. A direct 1 ms analog output allows both camera models a readout of a freely selectable 8 x 8 pixel region in real-time.

The use of these new image sensors allows a large dynamic range for temperature measurement so that the previously necessary use of relatively many and narrowly defined sub-ranges is no longer required. Intelligent measuring with a pyrometer is now possible thanks to the two-dimensional temperature recording of the optris® PI 05M and PI 1M.


Thanks to the large measurement temperature range of 450–2000 °C (842 – 3632 °F), the optris® PI 05M and PI 1M IR camera satisfies practically all demands in the fields of metal production and processing.




Measurement of pouring stream

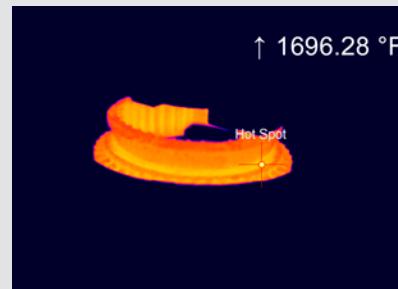

Induction heating

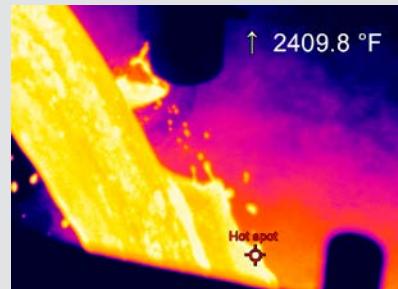

Measurement of pouring stream

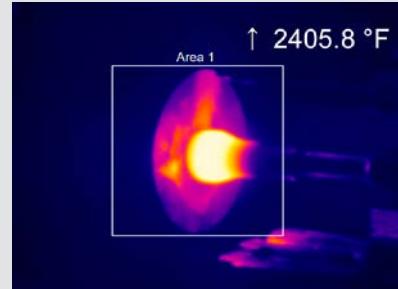

Electrical upsetting

Infrared cameras

Compact infrared cameras for fast online applications, including line scanning			
Base Model	PI 160	PI 200 / PI 230	PI 400
Type	IR	BI-SPECTRAL	IR
Detector	FPA, uncooled (25 µm x 25 µm)	FPA, uncooled (25 µm x 25 µm)	FPA, uncooled (25 µm x 25 µm)
Optical resolution	160 x 120 pixels	160 x 120 pixels	382 x 288 pixels
Spectral range	7.5 – 13 µm	7.5 – 13 µm	7.5 – 13 µm
Temperature ranges	-20 °C to 100 °C (-4 °F to 212 °F), 0 °C to 250 °C (32 °F to 482 °F), (20) 150 °C to 900 °C (302 °F to 1652 °F) ³⁾ , 200 °C to 1500 °C (392 °F to 2732 °F) (Option) ¹⁾	-20 °C to 100 °C (-4 °F to 212 °F), 0 °C to 250 °C (32 °F to 482 °F), (20) 150 °C to 900 °C (302 °F to 1652 °F) ³⁾ , 200 °C to 1500 °C (392 °F to 2732 °F) (Option) ¹⁾	-20 °C to 100 °C (-4 °F to 212 °F), 0 °C to 250 °C (32 °F to 482 °F), 150 °C to 900 °C (302 °F to 1652 °F) ³⁾ , 200 °C to 1500 °C (392 °F to 2732 °F) (Option) ¹⁾
Frame rate	120 Hz	128 Hz ⁴⁾	80 Hz
Optics (FOV)	23° x 17° / f = 10 mm (0.9 in) or 6° x 5° / f = 35.5 mm (1.4 in) or 41° x 31° / f = 5.7 mm (0.2 in) or 72° x 52° / f = 3.3 mm (0.13 in)	23° x 17° / f = 10 mm (0.9 in) or 6° x 5° / f = 35.5 mm (1.4 in) or 41° x 31° / f = 5.7 mm (0.2 in) or 72° x 52° / f = 3.3 mm (0.13 in)	29° x 22° / f = 18.7 mm (0.7 in) or 13° x 10° / f = 41 mm (1.6 in) or 53° x 40° / f = 10.5 mm (0.4 in) or 80° x 56° / f = 7.7 mm (0.3 in)
Thermal sensitivity (NETD)	0.08 K with 23° x 17° FOV / F = 0.8 0.3 K with 6° x 5° FOV / F = 1.6 0.1 K with 41° x 31° FOV and 72° x 52° FOV / F = 1	0.08 K with 23° x 17° FOV / F = 0.8 0.3 K with 6° x 5° FOV / F = 1.6 0.1 K with 41° x 31° FOV and 72° x 52° FOV / F = 1	0.04 K with 29° x 22° FOV / F = 0.8 0.04 K with 53° x 40° FOV / F = 0.8 0.04 K with 80° x 56° FOV / F = 0.8 0.06 K with 13° x 10° FOV / F = 1.0
Option for visual camera (only for BI-SPECTRAL camera)	–	Optical resolution: 640 x 480 pixels Frame rate: 32 Hz ⁴⁾ Optics (FOV): PI 200: 54° x 40°, PI 230: 30° x 23°	–
Accuracy	±2 °C (±4 °F) or ±2 %, whichever is greater	±2 °C (±4 °F) or ±2 %, whichever is greater	±2 °C (±4 °F) or ±2 %, whichever is greater
PC interface	USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion
Process interface (PIF)	Standard PIF Industrial PIF (option)	0–10 V input, digit. input (max. 24 V), 0–10 V output 2x 0–10 V inputs, digital input (max. 24 V), 3x 0–10 V outputs, 3x relay (0–30 V / 400 mA), fail-safe relay	0–10 V input, digit. input (max. 24 V), 0–10 V output 2x 0–10 V inputs, digital input (max. 24 V), 3x 0–10 V outputs, 3x relay (0–30 V / 400 mA), fail-safe relay
Ambient temperature (T _{Amb})	0 °C to 50 °C (32 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	PI 400: 0 °C to 60 °C (32 °F to 140 °F)
Storage temperature	-40 °C to 70 °C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)	PI 400: -40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity	20–80 %, non-condensing	20–80 %, non-condensing	20–80 %, non-condensing
Dimensions / protection class	45 x 45 x 62 mm (1.8 x 1.8 x 2.4 in)/IP 67 (NEMA 4)	45 x 45 x 62 mm (1.8 x 1.8 x 2.4 in)/IP 67 (NEMA 4)	46 x 56 x 90 mm (1.8 x 2.2 x 3.5 in)/IP 67 (NEMA 4)
Weight	195 g (6.9 oz), incl. lens	215 g (7.6 oz), incl. lens	320 g (11.3 oz), incl. lens
Shock / vibration	Shock: IEC 60068-2-27 (25 G and 50 G) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 G and 50 G) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 G and 50 G) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)
Tripod mount / Voltage supply	1/4-20 UNC / via USB	1/4-20 UNC / via USB	1/4-20 UNC / via USB
Scope of supply (standard)	<ul style="list-style-type: none"> • USB camera with 1 lens • USB cable (1 m) (3.3 ft) • Table-top tripod • PIF cable with connecting term. strip (1 m) (3.3ft) • optris® PI Connect software package • Aluminium case 	<ul style="list-style-type: none"> • USB camera with 1 lens and BI-SPECTRAL technology • USB cable (1 m) (3.3ft) • Table-top tripod • Focus tool • PIF cable with connecting term. strip (1 m) (3.3ft) • optris® PI Connect software package 	<ul style="list-style-type: none"> • USB camera with 1 lens • USB cable (1 m) (3.3 ft) • Table-top tripod • PIF cable with connecting term. strip (1 m) (3.3ft) • optris® PI Connect software package • Aluminium case (PI400) • Robust hard shell case (PI 450)

¹⁾ Not available for 72° (PI 160 / 2xx), 80° (PI 4xx) and 90° (PI 640) lenses

³⁾ Accuracy statement effective from 150 °C (302 °F)

²⁾ For ideal combination of IR and VIS image, a 41° HFOV lens is recommended (PI 200). For the PI 230, a 23° lens is recommended.



New

PI 640	PI 450 / PI 640 G7	PI 1M	PI 05M
IR	IR	IR	IR
FPA, uncooled (17 µm x 17 µm)	FPA, uncooled PI 450 G7: 25 µm x 25 µm / PI 640 G7: 17 µm x 17 µm	CMOS (15 µm x 15 µm)	CMOS (15 µm x 15 µm)
640 x 480 pixels VGA	PI 450 G7: 382 x 288 pixels PI 640 G7: 640 x 480 pixels	764 x 480 pixels @ 32 Hz 382 x 288 pixels @ 80 Hz (switchable to 27 Hz) 72 x 56 pixels @ 1 kHz 764 x 8 pixels @ 1 kHz (fast linescanning mode)	764 x 480 pixels @ 32 Hz 382 x 288 pixels @ 80 Hz (switchable to 27 Hz) 72 x 56 pixels @ 1 kHz 764 x 8 pixels @ 1 kHz (fast linescanning mode)
7.5–13 µm	7.9 µm	0.85–1.1 µm	500 nm ... 540 nm
-20 °C to 100 °C (-4 °F to 212 °F), 0 °C to 250 °C (32 °F to 482 °F), (20) 150 °C to 900 °C (302 °F to 1652 °F) ³⁾ , 200 °C to 1500 °C (392 °F to 2732 °F) (Option) ¹⁾	200 °C to 1500 °C (392 °F to 2732 °F)	450 °C ⁵⁾ to 1800 °C (842 °F ⁵⁾ to 3272 °F) (27 Hz mode) 500 °C ⁵⁾ to 1800 °C (932 °F ⁵⁾ to 3272 °F) (80 Hz and 32 Hz mode) 600 °C ⁵⁾ to 1800 °C (1112 °F ⁵⁾ to 3272 °F) (1 kHz mode)	900 °C to 2000 °C (1652 °F to 3632 °F) (27 Hz mode) 950 °C to 2000 °C (1742 °F to 3632 °F) (32 / 80 Hz mode) 1100 °C to 2000 °C (2012 °F to 3632 °F) (1 kHz mode)
32 Hz * 125 Hz in sub-frame mode (640 x 120 pixels)	PI 450 G7: 80 Hz / switchable to 27 Hz PI 640 G7: 32 Hz / 125 Hz in subframe-mode (640 x 120 pixels)	Up to 1 kHz / 1 ms real-time analog output (0 – 10 V) from 8 x 8 pixels (freely selectable)	Up to 1 kHz / 1 ms real-time analog output (0 – 10 V) from 8 x 8 pixels (freely selectable)
29° x 22° / f = 18.7 mm (0.7 in) or 13° x 10° / f = 41 mm (1.6 in) or 53° x 40° / f = 10.5 mm (0.4 in) or 80° x 56° / f = 7.7 mm (0.3 in)	PI 450 G7: 229° x 22° / f = 18.7 mm (0.7 in) or 13° x 10° / f = 41 mm (1.6 in) or 53° x 40° / f = 10.5 mm (0.4 in) or 80° x 56° / f = 7.7 mm (0.3 in) PI 640 G7: 33° x 25° (f = 18.7 mm) (0.7 in) 15° x 11° (f = 41.5 mm) (1.6 in) 60° x 45° (f = 10.5 mm) (0.4 in) 90° x 64° (f = 7.7 mm) (0.3 in)	FOV @ 764 x 480 px: 39° x 25° (f = 16 mm) (0.6 in) 26° x 16° (f = 25 mm) (1.0 in) 13° x 8° (f = 50 mm) (2.0 in) 9° x 5° (f = 75 mm) (3.0 in) FOV @ 382 x 288 px: 20° x 15° (f = 16 mm) (0.6 in) 13° x 10° (f = 25 mm) (1.0 in) 7° x 5° (f = 50 mm) (2.0 in) 4° x 3° (f = 75 mm) (3.0 in)	FOV @ 764 x 480 px: 26° x 16° (f = 25 mm) (1.0 in) FOV @ 382 x 288 px: 13° x 10° (f = 25 mm) (1.0 in)
75 mK	130 mK	<1 K (700 °C) (1292 °F) <2 K (1000 °C) (1832 °F)	<2 K (1400 °C) (2552 °F) for 27 Hz, 32 Hz, 80 Hz <2.5 K (1400 °C) (2552 °F) for 1 kHz
-	-	-	-
±2 °C (±4 °F) or ±2 %, whichever is greater	±2 °C (±4 °F) or ±2 %, whichever is greater	±1 % of reading (object temp. <1400 °C) (<2552 °F)	±1.5 % of reading
USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion	USB 2.0 / optional USB to GigE (PoE) conversion
0–10 V input, digit. input (max. 24 V), 0–10 V output	0–10 V input, digit. input (max. 24 V), 0–10 V output	0–10 V input, digit. input (max. 24 V), 0–10 V output	0–10 V input, digit. input (max. 24 V), 0–10 V output
2 x 0–10 V inputs, digital input (max. 24 V), 3 x 0–10 V outputs, 3 x relay (0–30 V / 400 mA), fail-safe relay	2 x 0–10 V inputs, digital input (max. 24 V), 3 x 0–10 V outputs, 3 x relay (0–30 V / 400 mA), fail-safe relay	2 x 0–10 V inputs, digital input (max. 24 V), 3 x 0–10 V outputs, 3 x relay (0–30 V / 400 mA), fail-safe relay	2 x 0–10 V inputs, digital input (max. 24 V), 3 x 0–10 V outputs, 3 x relay (0–30 V / 400 mA), fail-safe relays
0 °C to 50 °C (32 °F to 122 °F)	PI 450 G7: 0 °C to 70 °C (32 °F to 158 °F) / PI 640 G7: 0 °C to 50 °C (32 °F to 122 °F)	0 °C to 50 °C (41 °F to 122 °F)	0 °C to 50 °C (41 °F to 122 °F)
-40 °C to 70 °C (-40 °F to 158 °F)	PI 450 G7: -40 °C to 85 °C (-40 °F to 185 °F) PI 640 G7: -40 °C to 70 °C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)
20–80 %, non-condensing	20–80 %, non-condensing	20–80 %, non-condensing	20–80 %, non-condensing
46 x 56 x 90 mm (1.8 x 2.2 x 3.5 in)/IP 67 (NEMA 4)	46 x 56 x 90 mm (1.8 x 2.2 x 3.5 in)/IP 67 (NEMA 4)	46 x 56 x 90 mm (1.8 x 2.2 x 3.5 in)/IP 67 (NEMA 4)	46 x 56 x 90 mm (1.8 x 2.2 x 3.5 in)/IP 67 (NEMA 4)
320 g (11.3 oz), incl. lens	320 g (11.3 oz), incl. lens	320 g (11.3 oz), incl. lens	320 g (11.3 oz), incl. lens
Shock: IEC 60068-2-27 (25 G and 50 G) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 G and 50 G) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 G and 50 G) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)	Shock: IEC 60068-2-27 (25 G and 50 G) Vibration: IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)
1/4-20 UNC / via USB	1/4-20 UNC / via USB	1/4-20 UNC / via USB	1/4-20 UNC / via USB
• USB camera with 1 lens • USB cable (1 m) (3.3ft) • Table-top tripod • PIF cable with connecting term. strip (1 m) (3.3ft) • optris® PI Connect software package • Robust hard shell case	• USB camera with 1 lens • USB cable (1 m) (3.3ft) • Table-top tripod • PIF cable with connecting term. strip (1 m) (3.3ft) • optris® PI Connect software package • Robust hard shell case	• USB camera with 1 lens • Lens cap incl. protective window • USB cable (1 m) (3.3 ft) • PIF cable with connecting term. strip (1 m) (3.3ft) • optris® PI Connect software package • Optional: CoolingJacket, high temp. cable	• USB camera with 1 lens • lens protection tube incl. protective window • USB cable (1 m) (3.3ft) • PIF cable (1 m) (3.3 ft) incl. terminal block • Software package optris® PI Connect • Optional: CoolingJacket, high temp. cable

¹⁾ The following options can be set:

Opt. 1 (IR with 96 Hz at 160 x 120 px; VIS with 32 Hz at 640 x 480 px)

Opt. 2 (IR mit 128 Hz at 160 x 120 px; VIS with 32 Hz at 596 x 447 px)

⁵⁾ +75 °C (+167 °F) higher start temp. for optics with focal length f = 50 mm (2 in), f = 75 mm (3 in)⁶⁾ Only applies when lens protection tube is used

Radiometric aerial thermography



Possible extension with GoPro Hero camera, GPS USB flash drive and 2.4 GHz flight control receiver



- IR inspection with up to 640 x 480 pixels and a thermal sensitivity up to 40 mK
- Fully radiometrically calibrated system with high measuring accuracy of $\pm 2\%$ / $\pm 2^\circ\text{C}$ ($\pm 2\%$ / $\pm 36^\circ\text{F}$) in each pixel
- Two-piece 380 g (13.4 oz) design
- Radiometric onboard real-time recording with USB 3.0 stick
- GPS and GoPro support
- Video recording with low motion blur due to high frame rate (up to 125 Hz / VGA sub-frame mode)
- Free updates for the Recording Box software
- Comprehensive, license-free analysis software PI Connect
- Remote-controlled recording and switching between VIS / IR live video

Specifications LightWeight Recording Box

Power supply	10–48 V DC
Power consumption	12 W
Cooling	Active (integrated fan)
Ambient temperature	0 °C to 50 °C (32 °F to 122 °F)
Relative humidity	10–95 %/ non-condensing
Dimensions	96 x 67 x 47 mm (3.8 x 2.6 x 1.9 in)
Weight	380 g (13.4 oz) (PI camera + Recording Box)
Material (housing)	Aluminum
Module	Odroid XU4
Processor	Samsung Exynos/ 2 GHz
Operating system	Linux
Memory	16 GB eMMC, 2 GB RAM (LPDDR3), SDHC card (16 GB), USB 3.0 flash drive (128 GB)
Connections	Ethernet (GigE/ 1000 Mbit/ s), 2x USB 3.0/ 1x USB 2.0, 1x Mini-USB for GoPro Hero3+ (or better), 1x HDMI, 1x TVout, 2x JR connectors
Terminals	+5 V DC out, Video IN (VIS camera), TVout, 2x external switches
Control (via JR connectors or terminal)	Start/ Stop recording, Switch VIS/ IR camera
Additional features	GPS support, 5 Status LEDs

Specifications optris® PI camera head

Measuring range	-20 °C to 900 °C (-4 °F to 1652 °F)
Spectral range	7.5–13 µm
Accuracy	$\pm 2\%$ or $\pm 2^\circ\text{C}$ ($\pm 2\%$ or $\pm 36^\circ\text{F}$)
Thermal sensitivity (NETD)	40/ 80 mK (depending on camera model)
Optics	13° to 90° HFOV
Resolution	640 x 480 px / 382 x 288 px
Dimensions	46 x 56 x 90 mm (1.8 x 2.2 x 3.5 in)
Ambient temperature	0 °C to 50/ 70 °C (32 °F to 122/ 158 °F) (PI 450)

MINI PC FOR Optris® PI SERIES

Stand-alone solution for optris® PI series


- Miniature PC as an add-on to the PI series for stand-alone system or for cable extension via GigE
- Integrated hardware and software watchdog
- Installation of additional user software possible
- Status LEDs
- Processor: Intel® E3845 Quad Core / 1.91 GHz, 16 GB SSD, 2 GB RAM
- Connections: 2x USB 2.0, 1x USB 3.0, 1x Mini USB 2.0, Micro HDMI, Ethernet (Gigabit Ethernet), Micro SDHC/ SDXC card
- Operating system: Windows 7 Professional
- Wide supply voltage range (8–48 V DC) or Power over Ethernet (PoE)
- Can be integrated with CoolingJacket Advanced

General specifications

Ambient temperature	0 °C to 50 °C (32 °F to 122 °F)
Storage temperature	-20 °C to 75 °C (-4 °F to 167 °F)
Relative humidity	10–95 %, non-condensing
Material (casing)	Anodized aluminum
Dimensions	113 x 57 x 47 mm (4.4 x 2.2 x 1.9 in)
Weight	385 g (13.6 oz)
Vibration	IEC 60068-2-6 (sine-shaped) / IEC 60068-2-64 (broadband noise)
Shock	IEC 60068-2-27 (25 G and 50 G)
Operating system	Windows 7 Professional

Electrical specifications

Voltage supply	8–48 V DC or Power over Ethernet (PoE/ 1000BASE-T)
Power consumption	7.5 W (+ additional 2.5 W for PI camera)
Cooling	Active via two integrated fans
Module	COM Express® mini embedded board
Processor	Intel® E3845 Quad Core, 1.91 GHz
Hard drive	16 GB SSD
RAM	2 GB (DDR2, 533 MHz)
Connections	2x USB 2.0, 1x USB 3.0, 1x Mini USB 2.0, Micro HDMI, Ethernet (Gigabit Ethernet)
Memory card slots	micro SDHC/ SDXC card
Additional features	4x Status LEDs

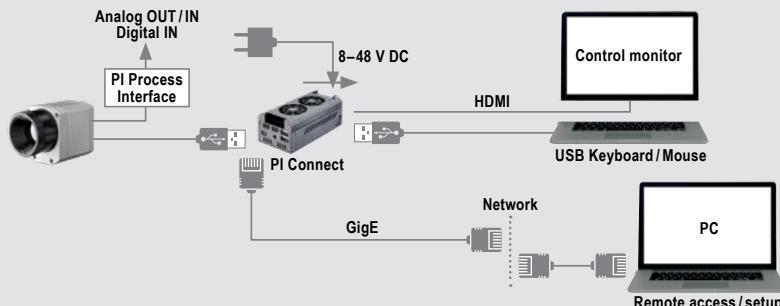Stand-alone solution with GigE remote access

Simple cable extension for the optris® PI series

- Fully compatible with USB 2.0, Data transfer rate 1.5 / 12 / 480 mbps, USB transfer mode: isochronous
- Network connection via Gigabit Ethernet
- For all models in the optris® PI series
- Full TCP/IP support incl. routing and DNS
- Two independent USB connections
- Power via PoE or external voltage supply at 24–48 V DC
- Galvanic isolation 500 V_{RMS} (network connection)
- Remote configuration via web-based management
- Certified technology from Wiesemann & Theis




Technical data

USB connections	2 x USB A Port
USB speed	480 Mbit/s
Network	10/100/1000 BaseT (max. 1000 Mbit/s)
Power supply	Power over Ethernet (PoE) class 3 (6.49 – 12.95 W) or via screw terminal DC 24 V ... 48 V (+/-10 %)
Power consumption	External power supply (24 V DC) without USB devices: typ. 120 mA External power supply (24 V DC) with 2 USB devices each 2.5 W : typ. 420 mA
Ambient temperature	Storage: -40 °C to 85 °C (-40 °F to 185 °F) In operation, individually assembled: 0 °C to 50 °C (32 °F to 122 °F)
Permissible relative humidity	0 – 95 % (non-condensing)
Casing	Compact plastic casing for DIN rail mount, 105 x 75 x 22 mm (4.13 x 2.95 x 0.87 in)
Weight	200 g (7.1 oz)
Contents	<ul style="list-style-type: none">• 1 x USB Server Gigabit• 24 V DC wall plug transformer• Quick guide* <p>* included on PI Connect CD or Compact Connect CD: – USB-Redirector – WuTility Management Tool – Operating instructions (DE / EN)</p>

Protocols

USB protocols	USB 1.0 / 1.1 / 2.0 Control / Bulk / Interrupt / Isochronous
Protocols for direct network connection	TCP/IP: Socket Auxiliary protocols: ARP, DHCP, HTTP, PING Inventory keeping, group management

Connection options

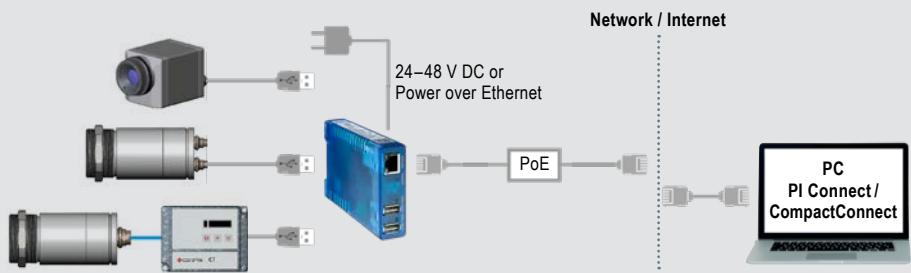

UNIVERSAL PROTECTIVE HOUSING FOR COOLING UP TO 315 °C (599 °F)

**Universal protection
for the optris® PI
series under harsh
industrial
environments**

- Operation at ambient temperatures of up to 315 °C (599 °F)
- Air/Water cooling with integrated air purging and optional protective windows
- Modular design for easy fitting of different devices and lenses

- Trouble-free, on the spot sensor removal via quick-release chassis
- Integration of additional components like PI NetBox, USB Server Gigabit and Industrial Process Interface (PIF) in the extended version




Technical data	CoolingJacket	CoolingJacket Advanced Standard	CoolingJacket Advanced Extended
Protective rating	IP 52	IP 65	IP 65
Ambient temperature	up to 180 °C (356 °F)	up to 315 °C (599 °F) ¹⁾	up to 315 °C (599 °F) ¹⁾
Relative humidity	10–95 %, non-condensing	10–95 %, non-condensing	10–95 %, non-condensing
Material (casing)	V2A	V2A	V2A
Dimensions	237 mm x 117 mm x 138 mm (9.33 in x 4.61 in x 5.43 in)	271 mm x 166 mm x 182 mm (10.7 in x 6.54 in x 7.17 in)	426 mm x 166 mm x 182 mm (16.8 in x 6.54 in x 7.17 in)
Weight	4.5 kg (9.9 lbs)	5.7 kg (12.6 lbs)	7.8 kg (17.2 lbs)
Air purge collar	G1/4" internal thread G3/8" external thread	G1/4" internal thread G3/8" external thread	G1/4" internal thread G3/8" external thread
Cooling water fittings	G1/4" internal thread G3/8" external thread	G1/4" internal thread G3/8" external thread	G1/4" internal thread G3/8" external thread
Cooling water pressure	max. 15 bar (217 psi)	max. 15 bar (217 psi)	max. 15 bar (217 psi)
Contents	<ul style="list-style-type: none"> • CoolingJacket, consisting of housing and chassis 	<ul style="list-style-type: none"> • CoolingJacket Advanced, consisting of housing with mounting brackets, chassis and focusing unit respectively front part²⁾ • Installation instructions 	<ul style="list-style-type: none"> • CoolingJacket Advanced, consisting of housing with mounting brackets, chassis and focusing unit respectively front part²⁾ • Mounting accessories for <ul style="list-style-type: none"> – PI Netbox or – USB Server Gigabit – Industrial PIF • Installation instructions

¹⁾ Cable for up to 250 °C (482 °F) ambient temperature as well as cable cooling for up to 315 °C (599 °F) available.


²⁾ Focusing unit and front part are exchangeable and have to be ordered separately.

Dimensions in mm


CoolingJacket Advanced – Extended version

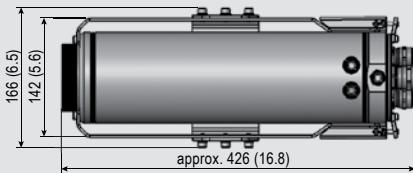

CoolingJacket Advanced – Standard version



CoolingJacket



optris® Industrial Process Interface

WITH FAIL-SAFE MONITORING

Camera and process control for use in an industrial environment

- Industrial Process Interface with 3 analog/alarm outputs, 2 analog inputs, 1 digital input, 3 alarm relays
- 500 V AC_{RMS} isolation voltage between camera and process
- Separate fail-safe relay output

- The PI hardware with all cable connections and the PI Connect software are permanently monitored during operation



General specifications

Protective rating	IP65 (NEMA-4)
Ambient temperature	-30 °C to 85 °C (-22 °F to 185 °F)
Storage temperature	-30 °C to 85 °C (-22 °F to 185 °F)
Humidity	10–95 %
Vibrational stability	IEC 60068-2-6 (non condensing)/ IEC 60068-2-64 (broadband noise)
Shock stability	IEC 60068-2-27 (25 G and 50 G)
Weight	610 g (21.5 oz) (with 5 m (16.4 ft) cable)
Cable lengths	5 m (16.4 ft) HT cable (standard), optional 10 m (32.8 ft) and 20 m (65.6 ft)

Electrical specifications

Voltage supply	5–24 V DC
LED indicators	2 green LEDs for voltage and fail safe / 3 red LEDs for alarm relay status
Isolation	500 V AC _{RMS} between PI camera und process
Outputs	3 analog / alarm outputs / 3 alarm relays ¹⁾
Inputs	2 analog inputs / 1 digital input
Ranges	0–10 V (for AO 1–3) ²⁾ 0–30 V / 400 mA (for alarm relays DO1–3) 0–10 V (for AI 1–2) 24 V (for DI)

Programmable functions

Analog inputs	<ul style="list-style-type: none">• Emissivity setting• Ambient temperature compensation• Reference temperature• Uncommitted value• Flag control• Triggered snapshots, triggered recordings, triggered line scan camera, triggered event grabber, max./min. search reset		
Digital input	<ul style="list-style-type: none">• Flag control• Triggered snapshots, triggered recordings, triggered line scan camera, triggered event grabber, max./min. search reset		
Analog outputs	<table><tr><td><ul style="list-style-type: none">• Main measurement range• Measurement range• Internal temperature• Flag status</td><td><ul style="list-style-type: none">• Alarm• Frame sync.• Fail-Safe• External communication</td></tr></table>	<ul style="list-style-type: none">• Main measurement range• Measurement range• Internal temperature• Flag status	<ul style="list-style-type: none">• Alarm• Frame sync.• Fail-Safe• External communication
<ul style="list-style-type: none">• Main measurement range• Measurement range• Internal temperature• Flag status	<ul style="list-style-type: none">• Alarm• Frame sync.• Fail-Safe• External communication		

¹⁾ Active when AO1, 2 or 3 is / are programmed as alarm output

²⁾ Dependent on supply voltage

UNIVERSAL PROTECTIVE HOUSING FOR THE INFRARED CAMERAS OF THE Optris® PI SERIES

Universal outdoor protection for infrared cameras of the optris® PI series


- Environmental rating IP 66
- Additional air purge collar allows for a continuous operation in dusty and humid conditions
- Heating element and built-in fan enable for a 24/7 operation from -40°C (-40°F)
- Installation of USB Server Gigabit possible for integration into control systems over large outdoor distances



Specifications

Environmental rating	IP 66
Ambient temperature	-40°C to 50°C (-40°F to 122°F)
Heating	PTC heater (automatically starting at $T < 15^{\circ}\text{C}$ ($T < 59^{\circ}\text{F}$)) / fan for homogeneous temperature distribution
Power supply	24 V DC
Power	70 W
Protective window	Germanium (Ge), zinc sulfide (ZnS), Borofloat or foil
Air purge collar	Integrated
Integrable additional components	USB Server Gigabit Industrial Process interface (PIF)
Max. FOV	90° (HFOV)
Accessories	Optional wall mount bracket

Example of fail-safe monitoring of the PI camera with connected PLC

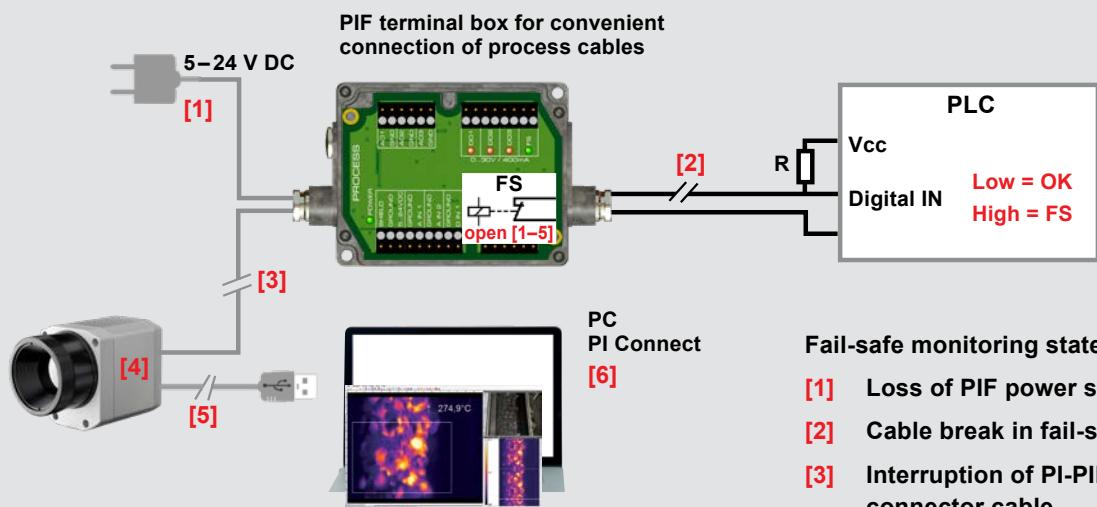

Fail-Safe-Status:

Normal:	Relais closed	LED on
Alarm:	Relais open	LED off

Fail-safe monitoring states

- [1] Loss of PIF power supply
- [2] Cable break in fail-safe cable
- [3] Interruption of PI-PIF connector cable
- [4] PI camera malfunction
- [5] Loss of PI power supply/
Interruption of USB cable
- [6] Malfunction of PI Connect software

1

Comprehensive IR camera software


- No additional costs
- No licensing restrictions
- Modern software with intuitive user interface
- Remote control of camera via software
- Display of numerous images in different windows
- Compatible with Windows 7, 8 and 10 as well as Linux (ubuntu)
- Extensive license-free analysis and two Software Development Kits for Windows and Linux included



3

High degree of individualization for customer-specific imaging


- Various layout options for individual customization (window arrangement, toolbar)
- Temperature display in °C or °F
- Various language options including translate function
- Choice of individual measurement parameters tailored to the respective application
- Editing of the thermal image (flip, rotate)
- Individual start options (full screen, hidden etc.)

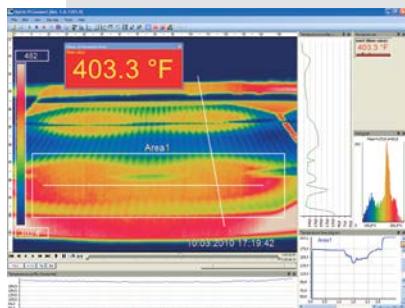

5

Video recording and snapshot function (IR or BI-SPECTRAL)


- Recording of video sequences and individual images for later analysis or documentation
- BI-SPECTRAL video analysis (IR and VIS) to highlight critical temperatures
- Adjustable frame rate to reduce data volume
- Display of snapshot process for direct analysis

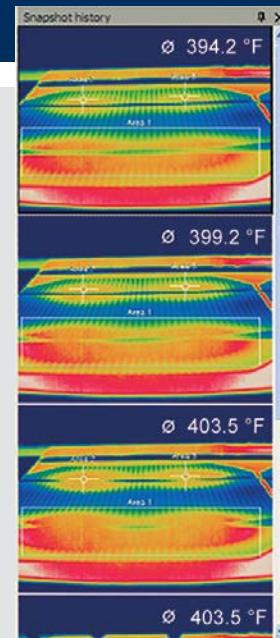

2

Detailed online and offline data analysis

- Real time temperature information in main window, as digital display or graphic display
- Detailed analysis with the help of measurement fields, automatic hotspot and coldspot search
- Logical linking of temperature information (measurement field discrepancy, image subtraction)
- Slow-motion replay of radiometric datasets and analysis even without connected camera
- Editing of sequences, e.g. cut and save individual images
- Various color palettes to highlight thermal contrasts

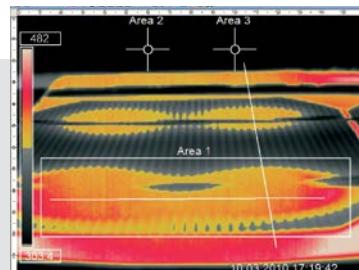

4

Automatic process control and quality control


- Individual setting of alarm thresholds depending on the process
- BI-SPECTRAL monitoring mode (IR and VIS) for easy orientation at the measuring point
- Definition of visual or acoustic alarms and analog data output
- Analog and digital signal input (parameter)
- External communication of software via Comports, DLL
- Adjustment of thermal image via reference values
- Measurement fields can be freely designed or created



6

Temperature data analysis and documentation

- Triggered data gathering
- Radiometric video sequences (*.ravi)
- Radiometric snapshots (*.tiff)
- Text files including comprehensive temperature information for analysis in Excel (*.csv, *.dat)
- Files with color information for standard programs like Photoshop or Windows Media Player (*.avi, *.tiff)
- Data transfer in real time to other software programs via DLL or COM-Port interfaces

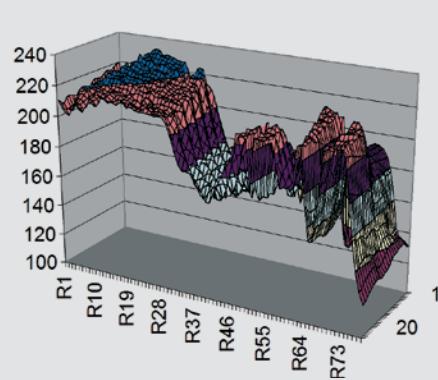

For the measurement of moving objects


The optris® PI Connect software is equipped with a line scan camera function. The line scanner is primarily used for processes involving moving measurement objects, like rotary kiln measurements or large quantities on conveyor belts (batch process).



Example of usage:
rotary kiln in the chemical industry

The advantages

Simple monitoring of processes with limited visual access

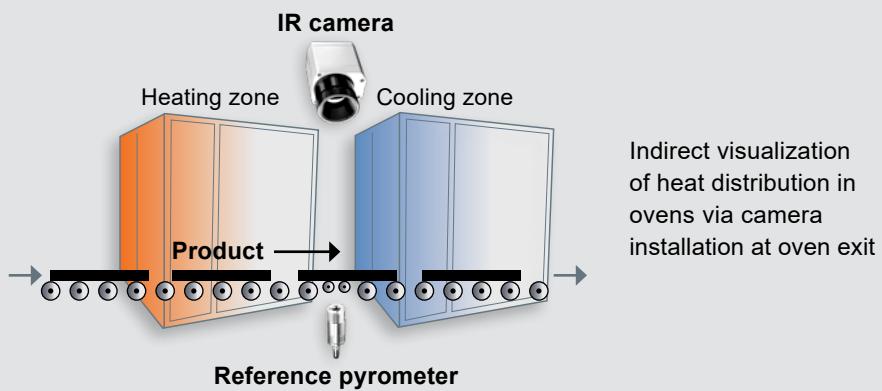

Only 3 steps to initialize the function

Step 1


Activation of the line scan camera function (continuous, self-triggered, external trigger) and definition of the position of the lines in the thermal image. For this the camera itself serves as an orientation aid.

Step 2

Configuration of line scan function, e.g. number of lines displayed or set trigger for automatic saving of images.

Step 3


Definition of individual layouts, e.g. display of saved images in the snapshot process.

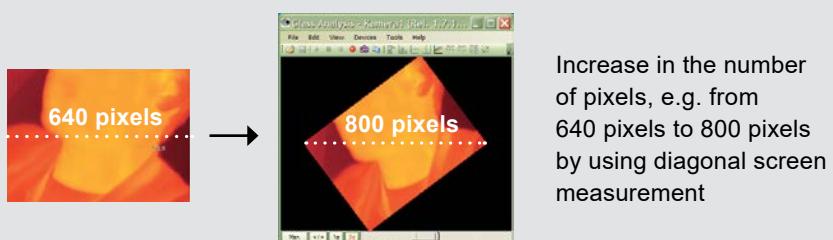

Increase in the number of pixels, e.g. from 640 pixels to 800 pixels by using diagonal screen measurement



Up to 32 Hz data recording* of unlimited lines which in turn produce a thermal image of any given resolution

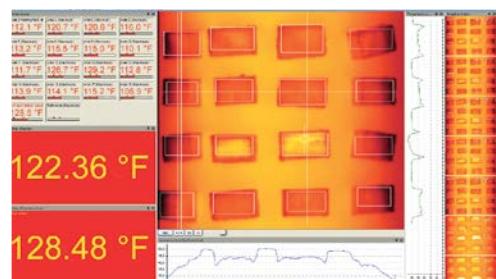

Layout example for display of line scan camera function

* Up to 125 Hz data recording when using 90° lens in subframe mode (640 x 120)

Precise measuring at various distances

A choice of lenses allows you to precisely measure objects at various distances, from close and standard distances right up to large distances.

With infrared cameras there are various parameters which display the relationship between the distance from the measuring object and the size of the pixel on the object plane. In choosing the correct lens, the following should be taken into account:

HFOV

Horizontal expansion of the total measuring field on the object plane.

VFOV

Vertical expansion of the total measuring field on the object plane

IFOV

Size of individual pixels on the object plane


DFOV

Diagonal expansion of the total measuring field on the object plane

MFOV

Recommended, smallest measuring object size of 3 x 3 pixels

Measuring field of optris® PI infrared camera using a 23° x 17° lens

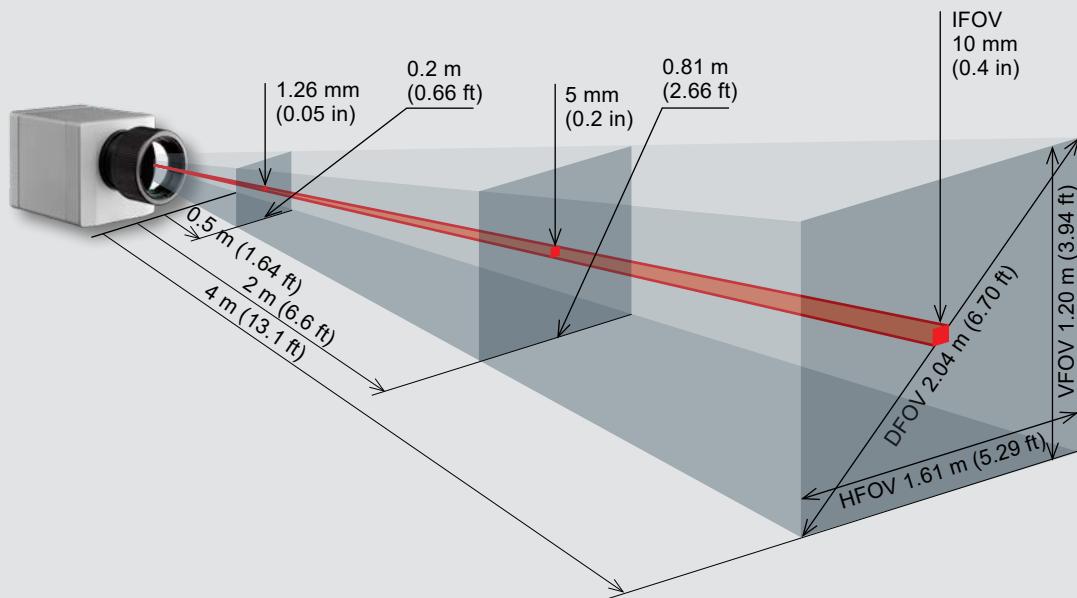

Optics calculator

Measurement field sizes for any given distance can be calculated online at www.optris.com/optics-calculator



Optical data

OPTICS

PI 160 / 200 160 x 120 px	Focal length [mm]	Minimum measurement distance*	Angle	Distance to measurement object [m (ft)]													
					0.02 (0.07)	0.1 (0.33)	0.2 (0.66)	0.3 (0.98)	0.5 (1.64)	1 (3.28)	2 (6.56)	4 (13.2)	6 (19.7)	10 (32.8)	30 (98.4)	100 (328.1)	
O23 Standard lens	10	0.2 m	23°	HFOV [m (ft)]	0.012 (0.04)	0.043 (0.14)	0.08 (0.26)	0.12 (0.39)	0.21 (0.69)	0.41 (1.34)	0.81 (2.67)	1.62 (3.90)	2.44 (8.00)	4.1 (13.45)	12.2 (40.03)	40.6 (133.2)	
				VFOV [m (ft)]	0.009 (0.03)	0.032 (0.11)	0.06 (0.2)	0.09 (0.29)	0.15 (0.49)	0.30 (0.98)	0.60 (1.97)	1.21 (3.97)	1.81 (5.94)	3.0 (9.84)	9.0 (29.5)	30.1 (98.6)	
				DFOV [m (ft)]	0.015 (0.05)	0.054 (0.18)	0.10 (0.33)	0.16 (0.53)	0.26 (0.85)	0.51 (1.67)	1.01 (3.31)	2.02 (6.63)	3.03 (9.94)	5.1 (16.7)	15.2 (49.9)	50.5 (165.7)	
			2.48 mrad	IFOV [mm (in)]	0.1 (0.00)	0.3 (0.01)	0.5 (0.02)	0.8 (0.03)	1.3 (0.05)	2.5 (0.10)	5.0 (0.20)	9.9 (0.39)	14.9 (0.59)	24.8 (0.98)	74.4 (74.4)	248.0 (9.76)	
O6 Telephoto lens	35.5	0.5 m	6°	HFOV [m (ft)]						0.06 (0.19)	0.11 (0.36)	0.23 (0.75)	0.45 (1.48)	0.68 (2.23)	1.1 (3.6)	3.4 (11.1)	11.3 (37.0)
				VFOV [m (ft)]						0.04 (0.13)	0.09 (0.29)	0.17 (0.56)	0.34 (1.11)	0.51 (1.67)	0.8 (2.62)	2.5 (8.20)	8.5 (27.9)
			8°	DFOV [m (ft)]						0.07 (0.23)	0.14 (0.46)	0.28 (0.92)	0.57 (1.87)	0.85 (2.79)	1.4 (4.6)	4.2 (13.8)	14.2 (46.6)
				IFOV [mm (in)]						0.4 (0.01)	0.7 (0.02)	1.4 (0.05)	2.8 (0.11)	4.2 (0.16)	7.0 (0.27)	21.1 (0.83)	70.4 (2.77)
O48 Wide angle lens	5.7	0.2 m	41°	HFOV [m (ft)]	0.022 (0.07)	0.082 (0.27)	0.16 (0.52)	0.23 (0.75)	0.38 (1.24)	0.76 (2.49)	1.51 (4.95)	3.00 (9.84)	4.50 (14.76)	7.5 (24.6)	22.5 (73.8)	74.9 (245.7)	
				VFOV [m (ft)]	0.016 (0.05)	0.059 (0.19)	0.11 (0.36)	0.17 (0.55)	0.28 (0.91)	0.55 (1.8)	1.10 (3.6)	2.19 (7.18)	3.28 (10.8)	5.5 (18.0)	16.4 (53.8)	54.5 (178.8)	
				DFOV [m (ft)]	0.027 (0.09)	0.101 (0.33)	0.19 (0.62)	0.29 (0.95)	0.47 (1.54)	0.94 (3.08)	1.86 (6.1)	3.72 (12.2)	5.57 (18.3)	9.3 (30.5)	27.8 (91.2)	92.7 (304.1)	
			4.39 mrad	IFOV [mm (in)]	0.1 (0.00)	0.4 (0.01)	0.9 (0.03)	1.3 (0.05)	2.2 (0.08)	4.4 (0.17)	8.8 (0.34)	17.5 (0.68)	26.3 (1.03)	43.9 (1.72)	131.6 (5.18)	438.6 (17.3)	
O72 Wide angle lens	3.3	0.2 m	72°	HFOV [m (ft)]	0.039 (0.12)	0.152 (0.5)	0.29 (0.95)	0.43 (1.41)	0.72 (2.36)	1.42 (4.66)	2.84 (9.31)	5.66 (18.6)	8.49 (27.9)	14.1 (46.3)	42.4 (139.1)	141.4 (463.9)	
				VFOV [m (ft)]	0.027 (0.09)	0.106 (0.35)	0.20 (0.65)	0.30 (0.98)	0.50 (1.64)	0.99 (3.24)	1.98 (6.49)	3.95 (13.0)	5.92 (19.4)	9.9 (32.5)	29.6 (97.1)	98.6 (323.5)	
				DFOV [m (ft)]	0.048 (0.16)	0.186 (0.61)	0.36 (1.18)	0.53 (1.73)	0.87 (2.85)	1.74 (5.71)	3.46 (11.35)	6.91 (22.67)	10.35 (33.95)	17.2 (56.42)	51.7 (169.61)	172.3 (565.3)	
			7.51 mrad	IFOV [mm (in)]	0.2 (0.01)	0.8 (0.31)	1.5 (0.06)	2.3 (0.09)	3.8 (0.15)	7.5 (0.3)	15.0 (0.6)	30.0 (1.2)	45.0 (1.8)	75.1 (2.95)	225.2 (8.87)	750.8 (29.6)	

PI 400 / PI 450 G7 382 x 288 px	Focal length [mm]	Minimum measurement distance*	Angle	Distance to measurement object [m (ft)]												
					0.02 (0.07)	0.1 (0.33)	0.2 (0.66)	0.3 (0.98)	0.5 (1.64)	1 (3.28)	2 (6.56)	4 (13.2)	6 (19.7)	10 (32.8)	30 (98.4)	100 (328.1)
O29 Standard lens	18.7	0,2 m	29°	HFOV [m (ft)]	0.060 (0.197)	0.11 (0.36)	0.16 (0.52)	0.27 (0.89)	0.53 (1.74)	1.0 (3.28)	2.1 (6.89)	3.1 (10.2)	5.2 (17.1)	15.6 (51.2)	52.1 (170.9)	
			22°	VFOV [m (ft)]	0.045 (0.15)	0.08 (0.26)	0.12 (0.39)	0.20 (0.66)	0.40 (1.31)	0.78 (2.56)	1.6 (5.25)	2.3 (7.55)	3.9 (12.8)	11.7 (38.4)	39.0 (128.0)	
			37°	DFOV [m (ft)]	0.074 (0.242)	0.14 (0.46)	0.20 (0.66)	0.33 (1.08)	0.66 (2.17)	1.3 (4.27)	2.6 (8.53)	3.9 (12.8)	6.5 (21.3)	19.5 (64.0)	65.1 (213.6)	
			1.34 mrad	IFOV [mm (in)]	0.1 (0.00)	0.3 (0.01)	0.4 (0.01)	0.7 (0.02)	1.3 (0.05)	2.7 (0.1)	5.4 (0.21)	8.0 (0.31)	13.4 (0.53)	40.1 (1.58)	133.7 (5.26)	
O13 Telephoto lens	41	0.5 m	13°	HFOV [m (ft)]					0.12 (0.39)	0.23 (0.75)	0.47 (1.54)	0.94 (3.08)	1.40 (4.59)	2.3 (7.55)	7.0 (23.0)	23.4 (76.8)
			10°	VFOV [m (ft)]					0.09 (0.30)	0.17 (0.56)	0.35 (1.15)	0.70 (2.30)	1.05 (3.44)	1.7 (5.58)	5.2 (17.1)	17.5 (57.4)
			17°	DFOV [m (ft)]					0.15 (0.49)	0.29 (0.95)	0.58 (1.90)	1.17 (3.83)	1.75 (5.74)	2.9 (9.51)	8.8 (28.9)	29.2 (95.8)
			0.61 mrad	IFOV [mm (in)]					0.3 (0.01)	0.6 (0.02)	1.2 (0.05)	2.5 (0.1)	3.7 (0.14)	6.1 (0.24)	18.4 (0.72)	61.2 (2.41)
O53 Wide angle lens	10.5	0,2 m	53°	HFOV [m (ft)]	0.11 (0.36)	0.21 (0.69)	0.31 (1.02)	0.51 (1.67)	1.0 (3.28)	2.0 (6.56)	4.0 (13.1)	6.0 (19.7)	9.9 (32.5)	29.7 (97.4)	99.0 (324.8)	
			40°	VFOV [m (ft)]	0.08 (0.26)	0.15 (0.49)	0.23 (0.75)	0.37 (1.21)	0.73 (2.39)	1.4 (4.59)	2.9 (9.51)	4.3 (14.1)	7.2 (23.6)	21.6 (70.9)	71.9 (236.0)	
			66°	DFOV [m (ft)]	0.14 (0.46)	0.26 (0.85)	0.38 (1.25)	0.63 (2.07)	1.2 (3.94)	2.5 (8.20)	4.9 (16.1)	7.4 (24.3)	12.2 (40.02)	36.7 (120.4)	122.3 (401.2)	
			2.38 mrad	IFOV [mm (in)]	0.2 (0.01)	0.5 (0.02)	0.7 (0.03)	1.2 (0.05)	2.4 (0.09)	4.8 (0.2)	9.5 (0.37)	14.3 (0.56)	23.8 (0.94)	71.5 (2.81)	238.4 (9.38)	
O80 Super wide angle lens	7.7	0.2 m	80°	HFOV [m (ft)]	0.182 (0.59)	0.35 (1.15)	0.84 (2.76)	0.84 (2.76)	1.65 (5.41)	3.29 (10.8)	6.55 (21.5)	9.82 (32.2)	16.4 (53.8)	49.0 (160.7)	163.4 (536.1)	
			56°	VFOV [m (ft)]	0.119 (0.39)	0.23 (0.75)	0.55 (1.80)	0.54 (1.77)	1.08 (3.54)	2.14 (7.02)	4.28 (14.04)	6.41 (21.03)	10.7 (35.1)	32.0 (105.0)	106.6 (349.7)	
			97°	DFOV [m (ft)]	0.218 (0.71)	0.41 (1.35)	1.00 (3.28)	1.00 (3.28)	1.97 (6.46)	3.92 (12.9)	7.83 (25.7)	11.73 (38.5)	19.5 (64.0)	58.5 (192.0)	195.1 (640.1)	
			3.25 mrad	IFOV [mm (in)]	0.3 (0.01)	0.7 (0.03)	1.6 (0.06)	1.6 (0.06)	3.3 (0.13)	6.5 (0.25)	13.0 (0.51)	19.5 (0.76)	32.5 (1.28)	97.4 (3.83)	324.7 (12.8)	

Optical data

OPTICS

PI 640 PI 640 G 7 640 x 480 px	Focal length [mm (in)]	Minimum measurement distance*	Angle	Distance to measurement object [m (ft)]												
					0.1 (0.33)	0.2 (0.66)	0.3 (0.98)	0.5 (1.64)	1 (3.28)	2 (6.56)	4 (13.2)	6 (19.7)	10 (32.8)	30 (98.4)	100 (328.1)	
O33 Standard lens	18.7 (0.74)	0.2 m (0.66 ft)	33°	HFOV [m (ft)]	0.068 (0.22)	0.13 (0.43)	0.19 (0.62)	0.31 (1.02)	0.60 (1.97)	1.20 (3.94)	2.38 (7.81)	3.57 (11.7)	5.9 (19.4)	17.8 (58.4)	59.3 (194.6)	
			25°	VFOV [m (ft)]	0.051 (0.17)	0.09 (0.30)	0.14 (0.46)	0.23 (0.75)	0.45 (1.48)	0.89 (2.92)	1.77 (5.81)	2.65 (8.69)	4.4 (14.4)	13.2 (43.3)	44.2 (145.0)	
			41°	DFOV [m (ft)]	0.085 (0.28)	0.16 (0.52)	0.23 (0.75)	0.38 (1.25)	0.75 (2.46)	1.49 (4.89)	2.97 (9.74)	4.45 (14.6)	7.4 (24.3)	22.2 (72.8)	74.0 (242.8)	
			0.91 mrad	IFOV [mm (in)]	0.1 (0.00)	0.2 (0.01)	0.3 (0.01)	0.5 (0.02)	0.9 (0.04)	1.8 (0.07)	3.6 (0.14)	5.5 (0.22)	9.1 (0.36)	27.3 (1.07)	90.9 (3.53)	
O15 Tele lens	41.5 (1.63)	0.5 m (1.64 ft)	15°	HFOV [m (ft)]					0.13 (0.43)	0.26 (0.85)	0.52 (1.71)	1.05 (3.44)	1.57 (5.15)	2.6 (8.53)	7.8 (25.6)	26.1 (85.6)
			11°	VFOV [m] (ft)					0.10 (0.33)	0.20 (0.66)	0.39 (1.28)	0.79 (2.59)	1.18 (3.87)	2.0 (6.56)	5.9 (19.4)	19.6 (64.3)
			19°	DFOV [m (ft)]					0.17 (0.56)	0.33 (1.08)	0.66 (2.17)	1.31 (4.30)	1.96 (6.43)	3.3 (10.8)	9.8 (32.2)	32.7 (107.3)
			0.41 mrad	IFOV [mm (in)]					0.2 (0.01)	0.4 (0.02)	0.8 (0.03)	1.6 (0.06)	2.5 (0.16)	4.1 (0.48)	12.3 (1.61)	41.0
O60 Wide angle lens	10.5 (0.41)	0.2 m (0.66 ft)	60°	HFOV [m (ft)]	0.128 (0.82)	0.25 (1.18)	0.36 (1.94)	0.59 (3.84)	1.17 (7.61)	2.32 (15.2)	4.63 (22.8)	6.94 (38.1)	11.6 (27.2)	34.6 (378.6)	115.4	
			45°	VFOV [m (ft)]	0.091 (0.59)	0.18 (0.85)	0.26 (1.38)	0.42 (2.72)	0.83 (5.45)	1.66 (10.9)	3.31 (16.3)	4.96 (27.2)	8.3 (81.0)	24.7 (270.3)	82.4	
			75°	DFOV [m (ft)]	0.157 (0.98)	0.30 (1.44)	0.44 (2.36)	0.72 (4.69)	1.43 (9.35)	2.85 (18.7)	5.69 (28.0)	8.52 (46.6)	14.2 (139.8)	42.6 (465.2)	141.8	
			1.62 mrad	IFOV [mm (in)]	0.2 (0.01)	0.3 (0.01)	0.5 (0.02)	0.8 (0.03)	1.6 (0.06)	3.2 (0.13)	6.5 (0.26)	9.7 (0.38)	16.2 (0.64)	48.6 (1.91)	161.9 (6.37)	
O90 Super wide angle lens	7.7 (0.30)	0.2 m (0.66 ft)	90°	HFOV [m (ft)]	0.220 (1.14)	0.43 (2.07)	0.63 (3.38)	1.03 (6.66)	2.03 (13.3)	4.04 (26.4)	8.06 (39.6)	12.07 (56.9)	20.1 (197.8)	60.3 (658.8)	200.8	
			64°	VFOV [m (ft)]	0.138 (0.89)	0.27 (1.28)	0.39 (2.10)	0.64 (4.17)	1.27 (8.30)	2.53 (16.6)	5.05 (24.8)	7.57 (41.3)	12.6 (124.0)	37.8 (413.1)	125.9	
			111°	DFOV [m (ft)]	0.260 (1.64)	0.50 (2.39)	0.73 (3.97)	1.21 (7.84)	2.39 (15.6)	4.76 (31.2)	9.50 (46.2)	14.24 (77.8)	23.7 (233.3)	71.1 (777.6)	237.0	
			2.21 mrad	IFOV [mm (in)]	0.2 (0.01)	0.4 (0.02)	0.7 (0.03)	1.1 (0.04)	2.2 (0.09)	4.4 (0.17)	8.8 (0.35)	13.2 (0.52)	22.1 (0.87)	66.2 (2.61)	220.8 (8.69)	

PI 1M / PI 05M ¹⁾ 382 x 288 px	Focal length [mm (in)]	Minimum measurement distance*	Angle	Distance to measurement object [m (ft)]											
					0.1 (0.33)	0.2 (0.66)	0.3 (0.98)	0.5 (1.64)	1 (3.28)	2 (6.56)	4 (13.2)	6 (19.7)	10 (32.8)	30 (98.4)	100 (328.1)
OF16	16 (0.63)	0.2 m (0.66 ft)	20°	HFOV [m (ft)]		0.07 (0.23)	0.11 (0.36)	0.18 (0.59)	0.36 (1.18)	0.72 (2.36)	1.43 (4.69)	2.15 (7.05)	3.6 (11.8)	10.7 (35.1)	35.8 (117.5)
			15°	VFOV [m (ft)]		0.05 (0.16)	0.08 (0.26)	0.14 (0.46)	0.27 (0.89)	0.54 (1.77)	1.08 (3.54)	1.62 (5.31)	2.7 (8.86)	8.1 (26.6)	27.0 (88.6)
			25°	DFOV [m (ft)]		0.09 (0.43)	0.13 (0.72)	0.22 (1.48)	0.45 (3.0)	0.90 (5.87)	1.79 (8.83)	2.69 (14.8)	4.5 (44.3)	13.5 (147.3)	44.9
			0.94 mrad	IFOV [mm (in)]		0.2 (0.01)	0.3 (0.01)	0.5 (0.02)	0.9 (0.04)	1.9 (0.07)	3.8 (0.15)	5.6 (0.22)	9.4 (0.37)	28.1 (1.11)	93.8 (3.69)
OF25	25 (0.98)	0.5 m (1.64 ft)	13°	HFOV [m (ft)]	0.023 (0.75)	0.05 (0.16)	0.07 (0.23)	0.11 (0.36)	0.23 (0.75)	0.46 (1.51)	0.92 (3.02)	1.38 (4.53)	2.3 (7.55)	6.9 (22.6)	22.9 (75.1)
			10°	VFOV [m (ft)]	0.017 (0.56)	0.03 (0.10)	0.05 (0.16)	0.09 (0.30)	0.17 (0.56)	0.35 (1.15)	0.69 (2.26)	1.04 (3.41)	1.7 (5.58)	5.2 (17.1)	17.3 (56.8)
			16°	DFOV [m (ft)]	0.029 (0.95)	0.06 (0.20)	0.09 (0.30)	0.14 (0.46)	0.29 (0.95)	0.57 (1.87)	1.15 (3.77)	1.72 (5.64)	2.9 (9.51)	8.6 (28.2)	28.7 (94.2)
			0.60 mrad	IFOV [mm (in)]	0.1 (0.00)	0.1 (0.00)	0.2 (0.01)	0.3 (0.01)	0.6 (80.2)	1.2 (0.05)	2.4 (0.09)	3.6 (0.14)	6.0 (0.24)	18.0 (0.71)	60.0 (0.36)
OF50	50 (1.97)	1.5 m (4.92)	7°	HFOV [m (ft)]				0.06 (0.20)	0.11 (0.36)	0.23 (0.75)	0.46 (1.51)	0.69 (2.26)	1.1 (3.61)	3.4 (11.2)	11.5 (37.7)
			5°	VFOV [m (ft)]				0.04 (0.30)	0.09 (0.56)	0.17 (1.15)	0.35 (1.71)	0.52 (0.30)	0.9 (0.30)	2.6 (8.53)	8.6 (28.2)
			8°	DFOV [m (ft)]				0.07 (0.23)	0.14 (0.46)	0.29 (0.95)	0.57 (1.87)	0.86 (2.82)	1.4 (0.46)	4.3 (14.1)	14.4 (47.2)
			0.30 mrad	IFOV [mm (in)]				0.2 (0.01)	0.3 (0.01)	0.6 (80.2)	1.2 (0.05)	1.8 (0.08)	3.0 (0.12)	9.0 (0.35)	30.0 (1.18)
OF75	75 (2.95)	2.0 m (6.56)	4°	HFOV [m (ft)]				0.08 (0.26)	0.15 (0.49)	0.31 (1.02)	0.46 (1.51)	0.8 (2.62)	2.3 (7.55)	7.6 (24.9)	
			3°	VFOV [m (ft)]				0.06 (0.20)	0.12 (0.39)	0.23 (0.75)	0.35 (1.15)	0.6 (0.20)	1.7 (5.6)	5.8 (19.0)	
			5°	DFOV [m (ft)]				0.10 (0.33)	0.19 (0.62)	0.38 (1.25)	0.57 (1.87)	1.0 (3.28)	2.9 (9.51)	9.6 (31.5)	
			0.20 mrad	IFOV [mm (in)]				0.2 (0.01)	0.4 (0.02)	0.8 (0.03)	1.2 (0.05)	2.0 (0.08)	6.0 (0.24)	20.0 (0.79)	

Table with examples showing which measurement field sizes and pixel sizes will be reached at which distance. For optimal configuration of the camera there are various lenses available. Wide angle lenses have radial distortion due to the angle of their aperture. The PI Connect software has an algorithm which corrects this distortion.

* Please note: Please use the optics calculator on our website in order to calculate measurement fields with shorter measurement distances: <http://www.optris.com/optics-calculator>
The measurement accuracy of the camera may lie outside of the specifications for distances below the defined minimum measurement distance.

¹⁾ PI 05M is only available with OF25 optics

Optical data

OPTICS

PI 1M / PI 05M ¹⁾ 764 x 480 px	Focal length [mm (in)]	Minimum measurement distance*	Angle	Distance to measurement object [m (ft)]												
					0.1 (0.33)	0.2 (0.66)	0.3 (0.98)	0.5 (1.64)	1 (3.28)	2 (6.56)	4 (13.2)	6 (19.7)	10 (32.8)	30 (98.4)	100 (328.1)	
OF16	16 (0.63)	0.2 m (0.66 ft)	39°	HFOV [m]		0.14 (0.46)	0.21 (0.69)	0.36 (1.18)	0.72 (2.36)	1.43 (4.69)	2.87 (9.42)	4.30 (14.1)	7.2 (23.6)	21.5 (70.5)	71.6 (235.0)	
			25°	VFOV [m]		0.09 (0.30)	0.14 (0.46)	0.23 (0.75)	0.45 (1.48)	0.90 (2.95)	1.80 (5.91)	2.70 (8.86)	4.5 (14.8)	13.5 (44.3)	45.0 (147.6)	
			46°	DFOV [m]		0.17 (0.56)	0.25 (0.82)	0.42 (1.38)	0.85 (2.79)	1.69 (5.54)	3.38 (11.1)	5.08 (16.7)	8.5 (27.9)	25.4 (83.3)	84.6 (277.6)	
			0.94 mrad	IFOV [mm]		0.2 (0.01)	0.3 (0.01)	0.5 (0.02)	0.9 (0.04)	1.9 (0.07)	3.8 (0.15)	5.6 (0.22)	9.4 (0.37)	28.1 (1.11)	93.8 (3.69)	
OF25	25 (0.98)	0.5 m (1.64 ft)	26°	HFOV [m]	0.046 (0.15)	0.09 (0.30)	0.14 (0.46)	0.23 (0.75)	0.46 (1.51)	0.92 (3.02)	1.83 (6.00)	2.75 (9.02)	4.6 (15.1)	13.8 (45.3)	45.8 (150.3)	
			16°	VFOV [m]	0.029 (0.10)	0.06 (0.20)	0.09 (0.30)	0.14 (0.46)	0.29 (0.95)	0.58 (1.90)	1.15 (3.77)	1.73 (5.68)	2.9 (9.51)	8.6 (28.2)	28.8 (94.5)	
			30°	DFOV [m]	0.054 (0.18)	0.11 (0.36)	0.16 (0.52)	0.27 (0.89)	0.54 (1.77)	1.08 (3.54)	2.17 (7.12)	3.25 (10.7)	5.4 (17.7)	16.2 (53.1)	54.1 (177.5)	
			0.60 mrad	IFOV [mm]	0.1 (0.0)	0.1 (0.0)	0.2 (0.01)	0.3 (0.01)	0.6 (0.02)	1.2 (0.02)	2.4 (0.09)	3.6 (0.14)	6.0 (0.24)	18.0 (0.71)	60.0 (2.36)	
OF50	50 (1.97)	1.5 m (4.92 ft)	13°	HFOV [m]					0.11 (0.36)	0.23 (0.75)	0.46 (1.51)	0.92 (3.02)	1.38 (4.53)	2.3 (7.55)	6.9 (22.6)	22.9 (75.1)
			8°	VFOV [m]					0.07 (0.23)	0.14 (0.46)	0.29 (0.95)	0.58 (1.90)	0.86 (2.82)	1.4 (4.59)	4.3 (14.1)	14.4 (47.2)
			15°	DFOV [m]					0.14 (0.46)	0.27 (0.89)	0.54 (1.77)	1.08 (3.54)	1.62 (5.31)	2.7 (8.86)	8.1 (26.6)	27.1 (88.9)
			0.30 mrad	IFOV [mm]					0.2 (0.01)	0.3 (0.01)	0.6 (0.02)	1.2 (0.02)	1.8 (0.07)	3.0 (0.12)	9.0 (0.35)	30.0 (1.18)
OF75	75 (2.95)	2.0 m (6.56 ft)	9°	HFOV [m]					0.15 (0.49)	0.31 (1.02)	0.61 (2.00)	0.92 (3.02)	1.5 (4.92)	4.6 (15.1)	15.3 (50.2)	
			5°	VFOV [m]					0.10 (0.33)	0.19 (0.62)	0.38 (1.25)	0.58 (1.90)	1.0 (3.28)	2.9 (9.51)	9.6 (31.5)	
			10°	DFOV [m]					0.18 (0.59)	0.36 (1.18)	0.72 (2.36)	1.08 (3.54)	1.8 (5.919)	5.4 (17.7)	18.0 (59.1)	
			0.20 mrad	IFOV [mm]					0.2 (0.01)	0.4 (0.02)	0.8 (0.03)	1.2 (0.05)	2.0 (0.08)	6.0 (0.24)	20.0 (0.79)	

¹⁾ PI 05M is only available with OF25 optics

nbn
ELEKTRONIK
www.nbn-elektronik.ch

nbn Elektronik AG

Haslenstrasse 7
CH-8903 Birmensdorf

Tel. +41 (0)44 523 63 33
Fax +41 (0)44 493 50 32
sales@nbn-elektronik.ch

innovative infrared technology

Opbris Infrared Sensing, LLC

200 International Drive

Suite 170

Portsmouth, NH 03801 USA

Phone: (603) 766-6062

E-mail: sales@opbris-ir.com

www.opbris.com