

Model SMT S-Type Overload Protected Load Cell (U.S. & Metric)

Why the Interface Model SMT S-Type Overload Protected Load Cell is the best in class:

- Proprietary Interface temperature compensated strain gages
- Overload protected in both tension and compression
- Safe overload to 10X capacity
- Low creep
- 1 to 450 lbf
- High performance



nbn
ELEKTRONIK AG
www.nbn-elektronik.ch

nbn Elektronik AG
Haslenstrasse 7
CH-8903 Birmensdorf
Tel. +41 (0)44 523 63 33
Fax +41 (0)44 493 50 32
sales@nbn-elektronik.ch

SPECIFICATIONS

ACCURACY - (MAX ERROR)	
Nonlinearity-% FS	±0.05
Hysteresis-% FS	±0.03
Nonrepeatability-% RO	±0.02
Creep, in 20 min-%	±0.025
TEMPERATURE	
Compensated Range-°F	0 to 125
Compensated Range-°C	-15 to 50
Operating Range-°F	-10 to 175
Operating Range-°C	-25 to 80
Effect on Output-%/°F - MAX	±0.0010
Effect on Output-%/°C - MAX	±0.0018
Effect on Zero- % RO/°F - MAX	±0.0015
Effect on Zero- % RO/°C - MAX	±0.0027
ELECTRICAL	
Rated Output-mV/V (nominal)	2.0
Zero Balance-%RO	±3.0
Bridge Resistance-Ohm (nominal)	350
Excitation Voltage-MAX	15 VDC
Insulation Resistance-Megohm	>5000
MECHANICAL	
Calibration	T & C
Safe Overload-% CAP (1.1, 2.2, 5.6, 11, 22, 56) (112, 225, 450)	1000 500
Cable Length-ft	5

STANDARD CONFIGURATION

5 ft Integral Cable

OPTIONS

Alternate Cable Length
Standardized Output


ACCESSORIES

Instrumentation
Mounting Hardware

Consult factory for more
technical information

Natural Frequency/Deflection:			
lbf	N	Deflection (inches)	Nat. Freq. (Hertz)
1.1	5	.014	100
2.2	10	.012	160
5.6	25	.011	260
11	50	.009	380
22	100	.007	600
56	250	.006	900
112	500	.007	600
225	1000	.007	1200
450	2000	.007	1500

DIMENSIONS

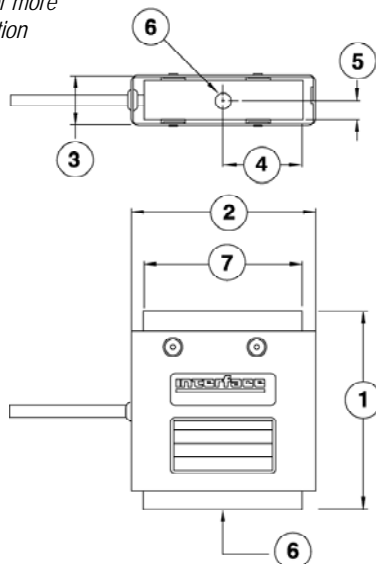

See Drawing	CAPACITY			
	SMT1		SMT2	
	U.S. (lbf)	Metric (N)	U.S. (lbf)	Metric (N)
	1.1, 2.2, 5.6 11, 22, 56	5, 10, 25 50, 100, 250	112, 225 450	500, 1000 2000
	inch	mm	inch	mm
(1)	2.48	63.0	2.98	75.7
(2)	2.33	59.2	2.33	59.2
(3)	0.65	16.5	1.15	29.2
(4)	0.98	24.9	0.98	24.9
(5)	0.24	6.1	0.49	12.4
(6)	1/4-28 UNF-3B 0.31 deep	M6 x 1-6H 8.0 deep	1/2-20 UNF-3B 0.57 deep	M12 x 1.75-6H 14.5 deep
(7)	1.96	49.8	1.96	49.8

SMT S-TYPE
11/24/09